

In good faith to build the backbone Using quality molded glory

Kinko

KINKO-FLUID EQUIPMENT CO.,LTD



Kinko KINKO-FLUID EQUIPMENT CO.,LTD

© No#90 Yangliu road,Xinghai street,Wenzhou Economic and Technological Development Zone,Wenzhou City,Zhejiang Province ,China .

+86-13185862950 / +86-13356119006 / +86-18968769287

+86-577- 8686 8399 / 8686 8799

+86-577- 8686 9099 / 8580 1712

info@kinko-flow.com / kathy@kinko-flow.com / comercial@kinko-flow.com



www.kinko-fluid.com

PROFESSIONAL PRODUCTION OF INTELLIGENT
CONTROL ACCESSORIES

CONTENTS

01-03 ABOUT KINKO

- 01 ABOUT US
- 02 ENTERPRISE QUALIFICATION
- 03 APPLICATION AREA

04-16 LIMIT SWITCH

- 04 APL510 SERIES
- 05 TPX410 SERIES
- 06 ITS300 SERIES
- 07 APL410 SERIES
- 08 WLF6G2 SERIES
- 09 ITS100 SERIES
- 10 APL310 SERIES
- 11 APL314 SERIES
- 12 APL210 SERIES
- 13 APL230 SERIES
- 14 DS414 SERIES
- 15 WLCA2-2 SERIES
- 16 DS515 SERIES

- 17 MOUNTING BRACKET SELECTION GUIDE
- 18 ACCESSORIES
- 19 ORDERING GUIDE FOR LIMIT SWITCH BOXES
- 20-21 PRODUCT CIRCUIT DIAGRAM

22-30 POSITIONER

- 22 KK900 SERIES
- 23 IP8081/IP8181 SERIES
- 24 YT-1000L SERIES
- 25 YT-1000R SERIES
- 26 IP8000/IP8100 SERIES
- 27 KK700 SERIES
- 28 EP4000 SERIES
- 29 KK700 SERIES
- 30 YT-1200 SERIES

31 PRESSURE REDUCING VALVE

- 31 YT-200/205 SERIES

32-43 SOLENOID VALVE

- 32-33 4M SERIES (5/2 WAY)
- 34-35 KK-4V210/220-08 SERIES(5/2 WAY)
- 36-37 KK-4V310/320 SERIES(5/2 WAY)
- 38-39 KK-4V410/420-08 SERIES
- 40-41 KK-3V310 SERIES(3/2 WAY)
- 42 KK-4V/M 310-AS SERIES(5/2 WAY)
- 43 KK800-XC SERIES
- 44 KK800-XC-SS SERIES
- 45 KK800-XK SERIES

46-51 FILTER PRESSURE REDUCING VALVE

- 46 AW2000 SERIES
- 47 KJW2000-02A SERIES
- 48 AW3000 SERIES
- 49 MINI SERIES
- 50 AW2000F SERIES
- 51 AIR REGULATOR

Kinko



ABOUT US

"KINKO Fluid Equipment Co., Ltd".is a professional fluid equipment enterprise that, Manufacture various kinds of pneumatic actuators, pneumatic butterfly valves, pneumatic ball valves, electric actuator, electric butterfly valves, electric ball valves, electric control valve, pneumatic control valve, pneumatic angle seat valve, manual butterfly valve, manual ball valve, Gear box, limit switch box, positioner.....


The company has international advanced assembly line, precision CNC machining centers as well as perfect testing equipment, and in strict accordance with ISO9001 international quality standard system of organizing production, testing, sales and service, to ensure product quality, product by ISO, DIN, 3A, IDF, SYS, JIS and GB standard ,the quality of full compliance with FDA/GMP requirements. Companies always try to improve and innovation management method and production management procedures, introduction of international advanced technology and equipment, improve product quality and after-sales service.

We do for the user "consulting, design, selection, installation", to solve all kinds of control trouble, adhering to the "quality first, customer first" corporate philosophy, the pursuit of the strive to high quality, the pursuit of efficient management, to seek the goal of science and technology development, Creating the "KINKO" international brand, always strive to win the trust of customers.

"KINKO" People warmly welcome customers to visit our company ! Establish a long-term relationship.



THE INTERNATIONAL MARKET

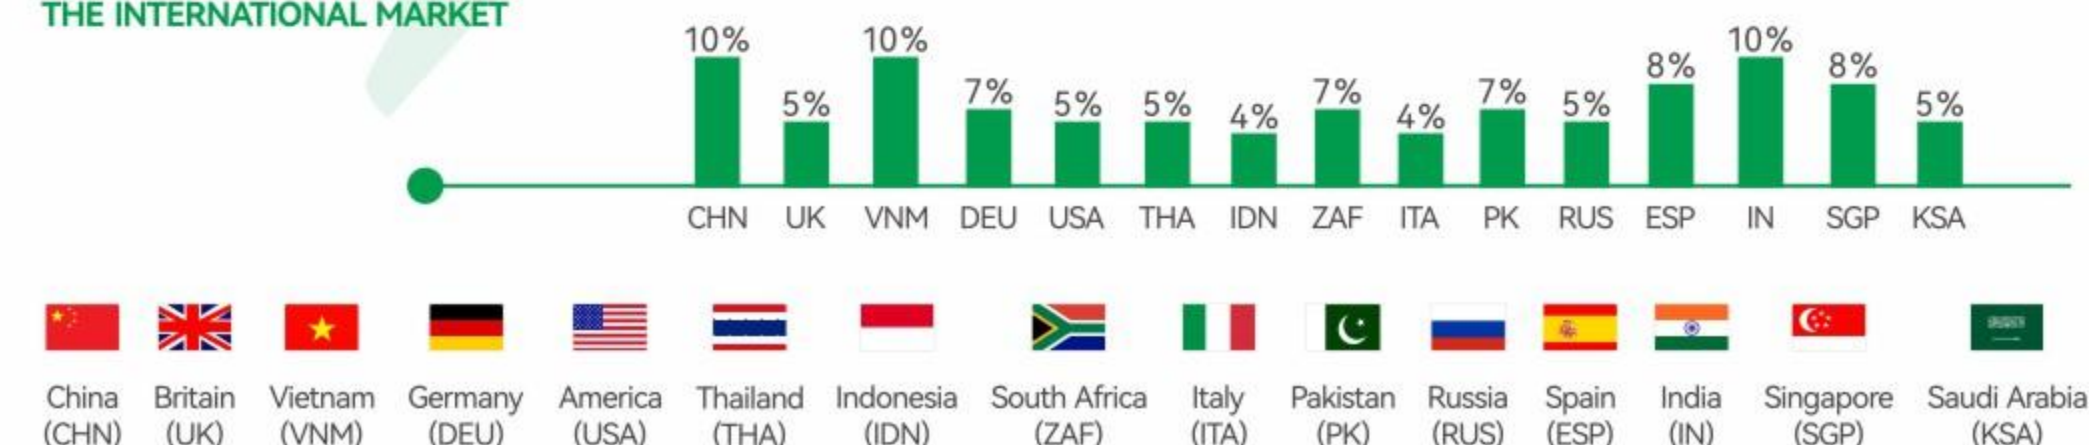

ENTERPRISE QUALIFICATION

Kinko

We are committed to creating excellent
and superior product quality



APPLICATION AREA


The product is widely used in

- Petroleum
- Chemical industry
- Natural gas
- Light industry
- Power
- Pharmacy
- Printing and dyeing
- Metallurgy
- Architectural engineering
- Refrigeration
- Water supply
- New energy
- Heating supply, etc



APL510 SERIES

Kinko

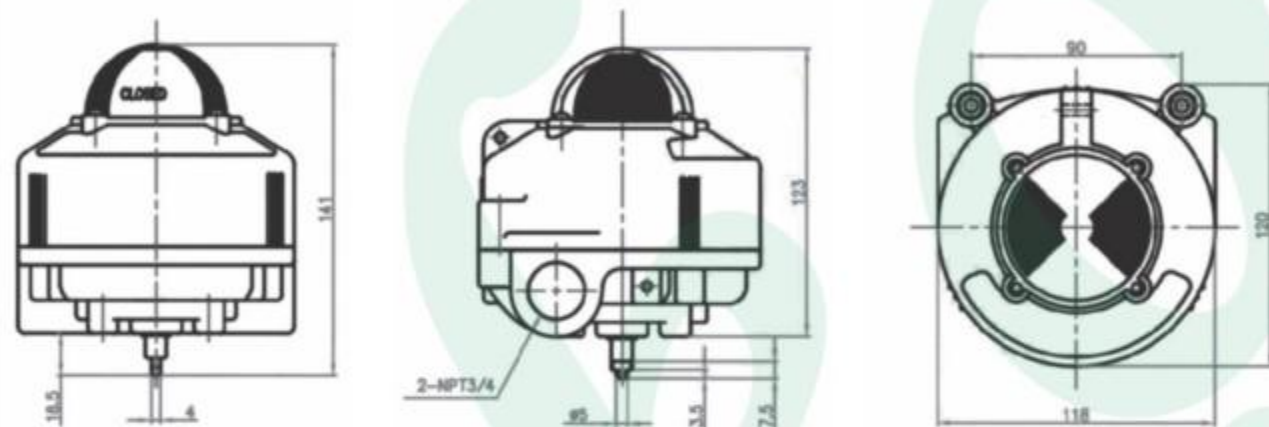


Technical Parameters

Item/Model	APL-510 Series Valve Limit Switch Box	
Housing Material	Die-Casting Aluminum or 316 Stainless Steel Optional	
Housing Paintcoat	Material:Polyester Powder Coating	
	Color:Customizable Black,Blue,Green,Yellow,Red,Silver,etc.	
Switch Specification	Mechanical Switch (SPDT)×2	5A 250VAC:Ordinary
		16A 125VAC/250VAC:Omron,Honeywell,etc.
		0.6A 125VDC:Ordinary,Omron,Honeywell,etc.
		10A 30VDC:Ordinary,Omron,Honeywell,etc.
Proximity Switch ×2		≤150mA 24VDC:Ordinary
		≤150mA 30VDC:Pepperl+FuchsNBB3,etc.
		≤150mA 8VDC: Intrinsically Safe Ordinary, Intrinsically Safe Pepperl+fuchsNJ2,etc.
Terminal Blocks	8 points	
Ambient Temperature	Common type -20℃ to+80℃,Customizable low temperature type.	
Weather Proof Grade	IP66	
Explosion Proof Grade	EXDIICT6,EXiaCT4,EXiaIICT6	
Mounting Bracket	Optional Material:Carbon Steel or 304 Stainless Steel Optional	
	Optional Model:Refer to Mounting Bracket Selection Table	
Fastener	Carbon Steel or 304 Stainless Steel Optional	
Indicator Lid	Flat Lid,Dome Lid	
Position Indication Color	Close:Red,Open:Yellow	
	Close:Red,Open:Green	
Cable Entry	Qty:2	
	Specifications:G34,NPT 1/2,NPT 3/4,M20	
Position Transmitter	4 to 20mA,with 24VDC Supply	
Single Net Weight	Die-Casting Aluminum:1.30 Kgs,316 Stainless Steel:3.40 Kgs	
Packing Specifications	1Pcs/Box,16 Pcs/Carton	

TPX410 SERIES

Kinko

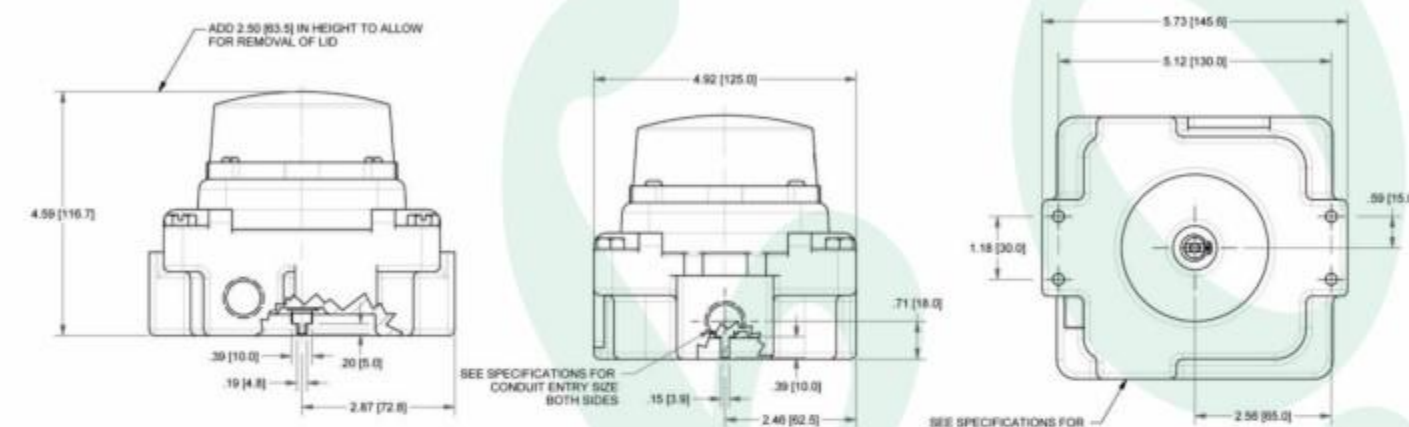


Technical Parameters

Item/Model	TPX410 Series Valve Limit Switch Box	
Housing Material	Die-Casting Aluminum	
Housing Paintcoat	Material:Polyester Powder Coating	
	Color:Customizable Black,Blue,Green,Yellow,Red,Silver,etc.	
Switch Specification	Mechanical Switch (SPDT)×2	16A 125VAC/250VAC:Honeywell
		0.6A 125VDC:Honeywell
		10A 30VDC:Honeywell
Terminal Blocks	8 points	
Ambient Temperature	Common type -20℃ to+80℃,Customizable low temperature type.	
Weather Proof Grade	IP66	
Explosion Proof Grade	EXDIIBT6	
Mounting Bracket	Optional Material:Carbon Steel or 304 Stainless Steel Optional	
	Optional Model:Refer to Mounting Bracket Selection Table	
Fastener	Carbon Steel or 304 Stainless Steel Optional	
Indicator Lid	Flat Lid	
Position Indication Color	Close:Red,Open:Yellow	
	Close:Red,Open:Green	
Cable Entry	Qty:2	
	Specifications:NPT 12,M20	
Position Transmitter	4 to 20mA,with 24VDC Supply	
Single Net Weight	1.60 Kgs	
Packing Specifications	1 Pcs/Box,12 Pcs/Carton	

ITS300 SERIES

Kinko

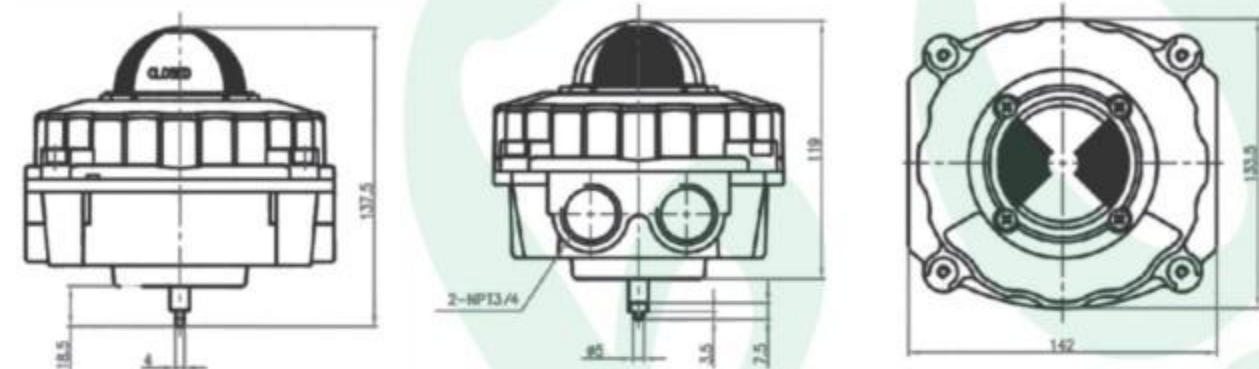


Technical Parameters

Item/Model	ITS300 Series Valve Limit Switch Box	
Housing Material	Die-Casting Aluminum or 304 Stainless Steel Optional	
Housing Paintcoat	Material:Polyester Powder Coating	
	Color:Customizable Black,Blue,Green,Yellow,Red,Silver,etc.	
Switch Specification	Mechanical Switch SPDT×2, or DPDT×2	5A 250VAC:Ordinary
		16A 125VAC/250VAC:Omron,Honeywell,etc.
		0.6A 125VDC:Ordinary,Omron,Honeywell,etc.
		10A 30VDC:Ordinary,Omron,Honeywell,etc.
Proximity Switch ×2		≤150mA 24VDC:Ordinary
		≤150mA 30VDC:Pepperl+FuchsNBB3,etc.
		≤150mA 8VDC: Intrinsically Safe Ordinary, Intrinsically Safe Pepperl+fuchsNJ2,etc.
Terminal Blocks	8 points	
Ambient Temperature	Common type -20℃ to+80℃,Customizable low temperature type.	
Weather Proof Grade	IP66	
Explosion Proof Grade	EXDIICT6,EXIallCT4,EXIallCT6	
Mounting Bracket	Optional Material:Carbon Steel or 304 Stainless Steel Optional	
	Optional Model:Refer to Mounting Bracket Selection Table	
Fastener	Carbon Steel or 304 Stainless Steel Optional	
Indicator Lid	Flat Lid,Dome Lid	
	Close:Red,Open:Yellow	
Position Indication Color	Close:Red,Open:Green	
	Qty:2 to 4	
Cable Entry	Specifications:G34,NPT 1/2,NPT 3/4,M20	
Position Transmitter	4 to 20mA,with 24VDC Supply	
Single Net Weight	Die-Casting Aluminum:1.550 Kgs,304 Stainless Steel Optional:4.0kgs	
Packing Specifications	1Pcs/Box,16 Pcs/Carton	

APL410 SERIES

Kinko

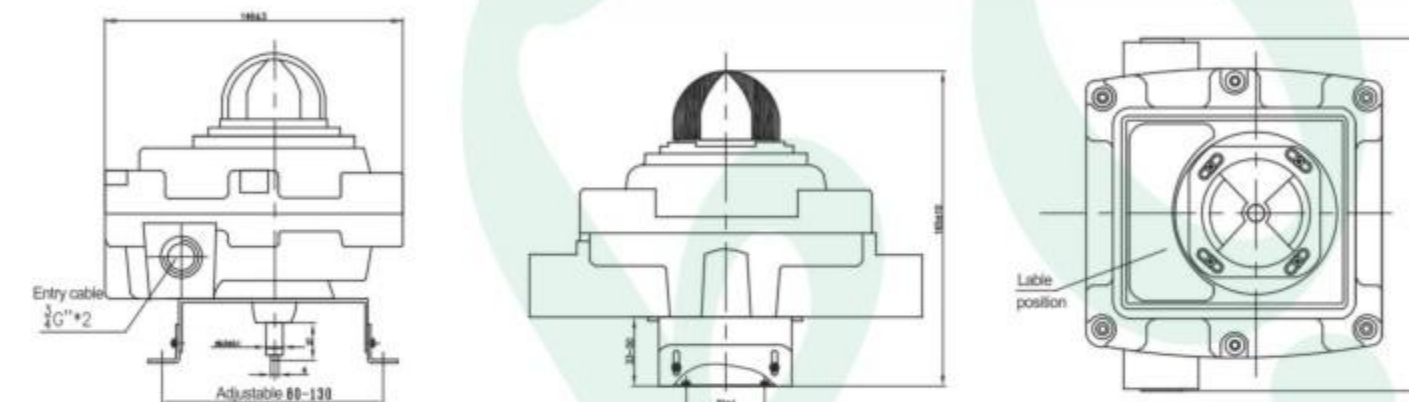


Technical Parameters

Item/Model	APL410 Series Valve Limit Switch Box	
Housing Material	Die-Casting Aluminum	
Housing Paintcoat	Material:Polyester Powder Coating	
	Color:Customizable Black,Blue,Green,Yellow,Red,Silver,etc.	
Switch Specification	Mechanical Switch (SPDT)×2	5A 250VAC:Ordinary
		16A 125VAC/250VAC:Omron,Honeywell,etc.
		0.6A 125VDC:Ordinary,Omron,Honeywell,etc.
		10A 30VDC:Ordinary,Omron,Honeywell,etc.
Proximity Switch ×2		≤150mA 24VDC:Ordinary
		≤150mA 30VDC:Pepperl+FuchsNBB3,etc.
		≤150mA 8VDC: Intrinsically Safe Ordinary, Intrinsically Safe Pepperl+fuchsNJ2,etc.
Terminal Blocks	8 points	
Ambient Temperature	Common type -20℃ to+80℃,Customizable low temperature type.	
Weather Proof Grade	IP66	
Explosion Proof Grade	EXDIICT6,EXIallCT4,EXIallCT6	
Mounting Bracket	Optional Material:Carbon Steel or 304 Stainless Steel Optional	
	Optional Model:Refer to Mounting Bracket Selection Table	
Fastener	Carbon Steel or 304 Stainless Steel Optional	
Indicator Lid	Dome Lid	
	Close:Red,Open:Yellow	
Position Indication Color	Close:Red,Open:Green	
	Qty:2	
Cable Entry	Specifications:G3/4,NPT 1/2,NPT3/4,M20	
Position Transmitter	4 to 20mA,with 24VDC Supply	
Single Net Weight	1.45 Kgs	
Packing Specifications	1Pcs/Box,12Pcs/Carton	

WLF6G2 SERIES

Kinko

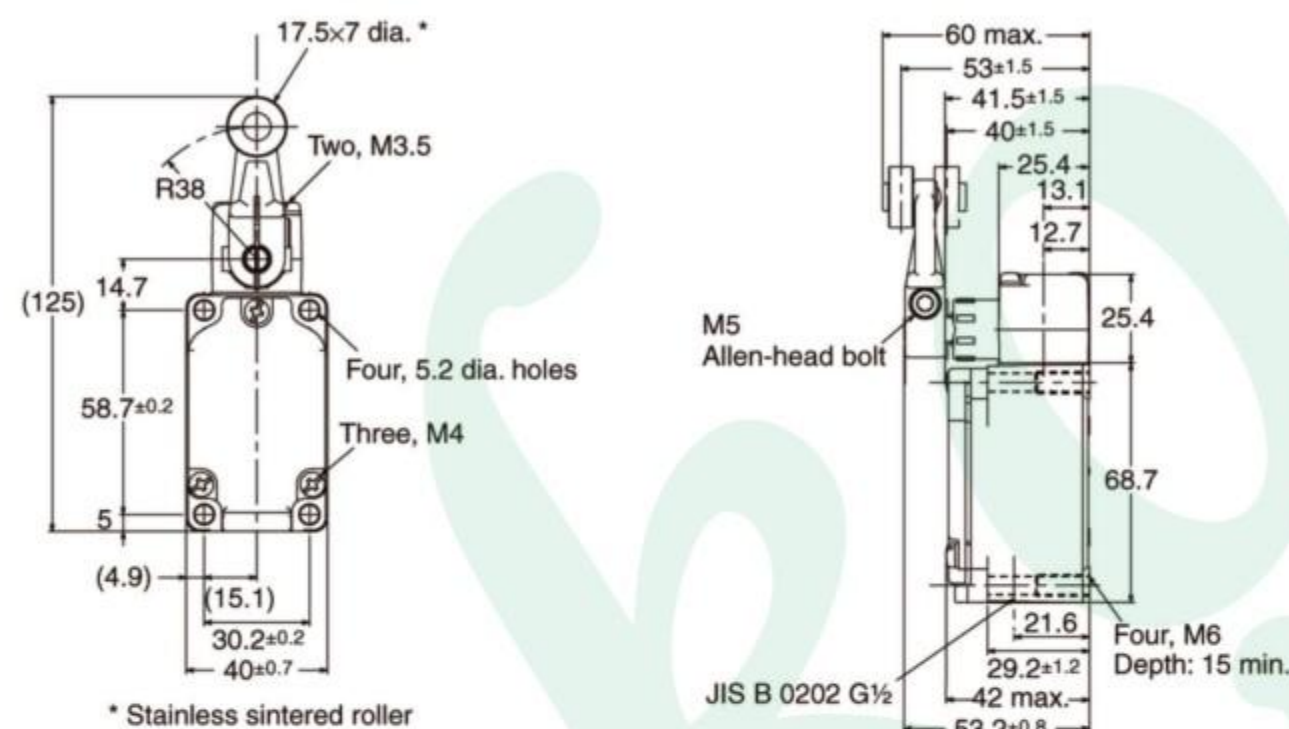


Technical Parameters

Item/Model	WLF6G2 Series Straight Travel Limit Switch
Housing Material	Die-Casting Aluminum
Housing Color	Blue
Rating	VAC250V 2A Resistive load;VAC250V 0.5ALamp Load; VDC125V 1AResistive load;VDC30V 1ALamp Load.
Ambient Temperature	Common type-20°Cto+80°C,Customizable low temperature type.
Weather Proof Grade	IP65
Explosion Proof Grade	EXDIICT6
Cable Entry	Qty:1 Specifications:NPT 1/2
Single Net Weight	0.39 Kgs
Packing Specifications	100 Pcs/Carton

ITS100 SERIES

Kinko

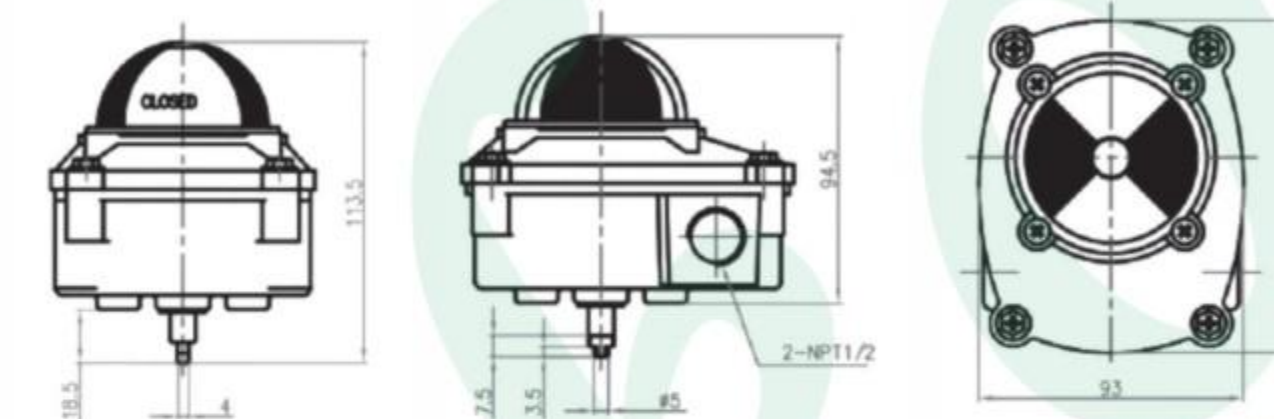


Technical Parameters

Item/Model	ITS100 Series Valve Limit Switch Box
Housing Material	Die-Casting Aluminum
Housing Paintcoat	Material:Polyester Powder Coating Color:Customizable Black,Blue,Green,Yellow,Red,Silver,etc.
Switch Specification	Mechanical Switch (SPDT)×2 5A 250VAC:Ordinary 16A 125VAC/250VAC:Omron,Honeywell,etc. 0.6A 125VDC:Ordinary,Omron,Honeywell,etc. 10A 30VDC:Ordinary,Omron,Honeywell,etc. Proximity Switch ×2 ≤150mA 24VDC:Ordinary ≤150mA 30VDC:Pepperl+FuchsNBB3,etc. ≤150mA 8VDC: Intrinsically Safe Ordinary, Intrinsically Safe Pepperl+fuchsNJ2,etc.
Terminal Blocks	8 points
Ambient Temperature	Common type -20°C to+80°C,Customizable low temperature type.
Weather Proof Grade	IP67
Explosion Proof Grade	Non-explosion Proof,EXIallCT4,EXIallCT6
Mounting Bracket	Optional Material:Carbon Steel or 304 Stainless Steel Optional Optional Model:Refer to Mounting Bracket Selection Table
Fastener	Carbon Steel or 304 Stainless Steel Optional
Indicator Lid	Dome Lid
Position Indication Color	Close:Red,Open:Yellow Close:Red,Open:Green
Cable Entry	Qty:2 Specifications:NPT1/2,M20
Position Transmitter	4 to 20mA,with 24VDC Supply
Single Net Weight	0.8Kgs
Packing Specifications	1Pcs/Box,45Pcs/Carton

APL310 SERIES

Kinko

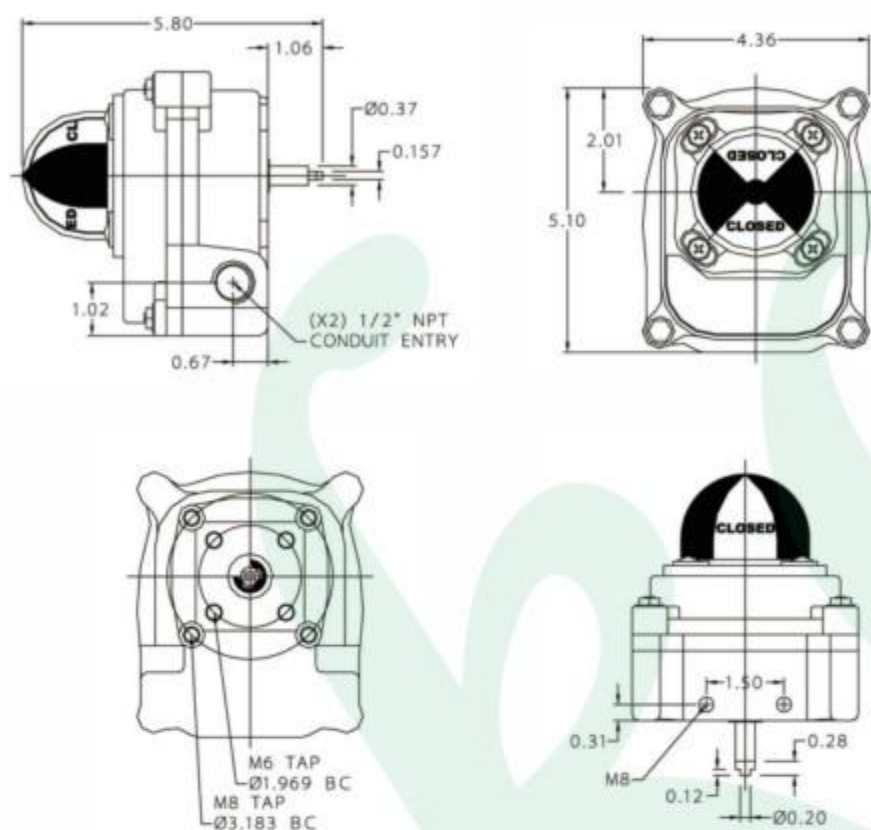


Technical Parameters

Item/Model	APL310 Series Valve Limit Switch Box		
Housing Material	Die-Casting Aluminum		
Housing Paintcoat	Material:Polyester Powder Coating		
	Color:Customizable Black,Blue,Green,Yellow,Red,Silver,etc.		
Switch Specification	Mechanical Switch (SPDT)×2	5A 250VAC:Ordinary	
		16A 125VAC I250VAC:Omron,Honeywell,etc	
		0.6A 125VDC:Ordinary,Omron,Honeywell,etc.	
		10A 30VDC:Ordinary,Omron,Honeywell,etc.	
Terminal Blocks	8 points		
Ambient Temperature	Common type -20℃ to+80℃,Customizable low temperature type.		
Weather Proof Grade	IP67		
Explosion Proof Grade	Non-explosion Proof		
Mounting Bracket	Optional Material:Carbon Steel or 304 Stainless Steel Optional		
	Optional Model:Refer to Mounting Bracket Selection Table		
Fastener	Carbon Steel or 304 Stainless Steel Optional		
Indicator Lid	Flat Lid,Dome Lid		
Position Indication Color	Close:Red,Open:Yellow		
	Close:Red,Open:Green		
Cable Entry	Qty:2		
	Specifications:G1/2		
Position Transmitter	4 to 20mA,with 24VDC Supply		
Single Net Weight	1.10 Kgs		
Packing Specifications	1Pcs/Box,16 Pcs/Carton or 24 Pcs/Carton		

APL314 SERIES

Kinko

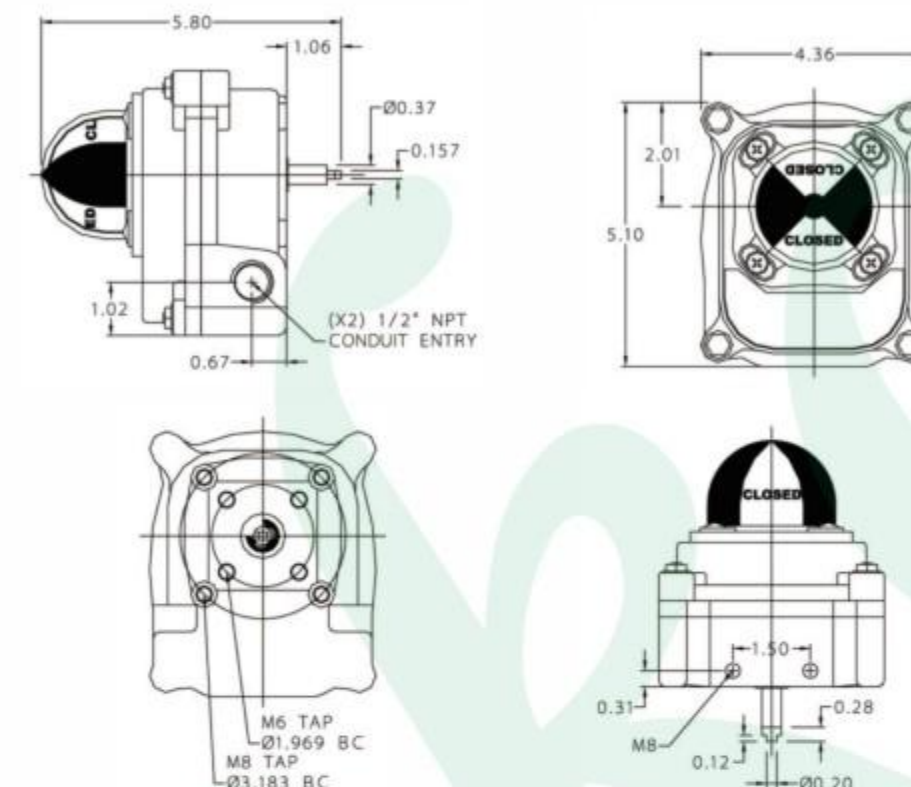


Technical Parameters

Item/Model	APL314 Series Valve Limit Switch Box		
Housing Material	Die-Casting Aluminum		
Housing Paintcoat	Material:Polyester Powder Coating		
	Color:Customizable Black,Blue,Green,Yellow,Red,Silver,etc.		
Switch Specification	Mechanical Switch (SPDT)×2	5A 250VAC:Ordinary	
		16A 125VAC/250VAC:Omron,Honeywell,etc	
		0.6A 125VDC:Ordinary,Omron,Honeywell,etc.	
		10A 30VDC:Ordinary,Omron,Honeywell,etc.	
Terminal Blocks	8 points		
Ambient Temperature	Common type -20℃ to+80℃,Customizable low temperature type.		
Weather Proof Grade	IP67		
Explosion Proof Grade	Non-explosion Proof		
Mounting Bracket	4 Stainless Steel Optional		
	Optional Model:Refer to Mounting Bracket Selection Table		
Fastener	Carbon Steel or 304 Stainless Steel Optional		
Indicator Lid	Dome Lid		
Position Indication Color	Close:Red,Open:Yellow		
	Close:Red,Open:Green		
Cable Entry	Qty:2		
	Specifications:G1/2		
Position Transmitter	4 to 20mA,with 24VDC Supply		
Single Net Weight	1.15Kgs		
Packing Specifications	1Pcs/Box,16 Pcs/Carton or 24 Pcs/Carton		

APL210 SERIES

Kinko

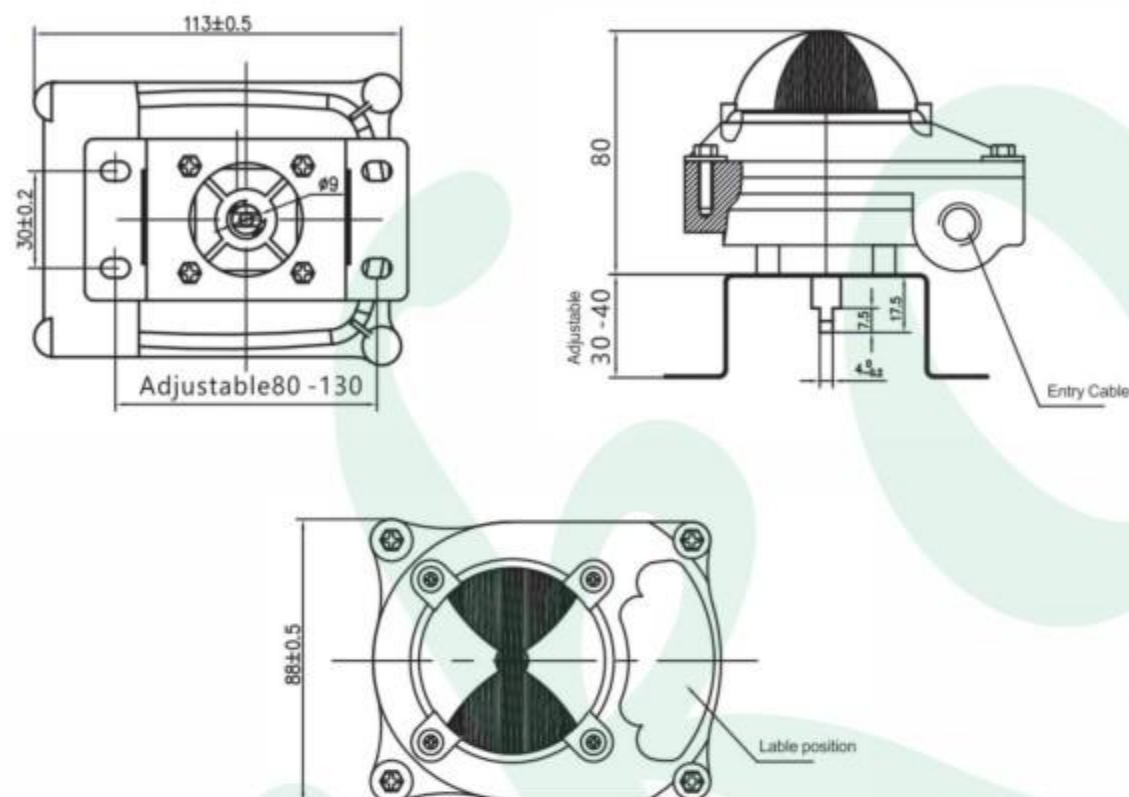


Technical Parameters

Item/Model	APL210 Series Valve Limit Switch Box	
Housing Material	Die-Casting Aluminum	
Housing Paintcoat	Material:Polyester Powder Coating	
	Color:Customizable Black,Blue,Green,Yellow,Red,Silver,etc.	
Switch Specification	Mechanical Switch (SPDT)×2	5A 250VAC:Ordinary
		16A 125VAC/250VAC:Omron,Honeywell,etc.
		0.6A 125VDC:Ordinary,Omron,Honeywell,etc.
		10A 30VDC:Ordinary,Omron,Honeywell,etc.
Proximity Switch ×2		≤150mA 24VDC:Ordinary
		≤150mA 30VDC:Pepperl+FuchsNBB3,etc.
		≤150mA 8VDC: Intrinsically Safe Ordinary, Intrinsically Safe Pepperl+fuchsNJ2,etc.
Terminal Blocks	8 points	
Ambient Temperature	Common type -20℃ to+80℃,Customizable low temperature type.	
Weather Proof Grade	IP67	
Explosion Proof Grade	Non-explosion Proof,EXialICT4,EXialICT6	
Mounting Bracket	Optional Material:Carbon Steel or 304 Stainless Steel Optional	
	Optional Model:Refer to Mounting Bracket Selection Table	
Fastener	Carbon Steel or 304 Stainless Steel Optional	
Indicator Lid	Flat Lid,Dome Lid	
	Close:Red,Open:Yellow	
Position Indication Color	Close:Red,Open:Green	
	Qty:2	
Cable Entry	Specifications:G1/2,NPT 1/2,M20	
	4 to 20mA,with 24VDC Supply	
Position Transmitter	4 to 20mA,with 24VDC Supply	
Single Net Weight	0.570 Kgs	
Packing Specifications	1Pcs/Box,50 Pcs/Carton	

APL230 SERIES

Kinko

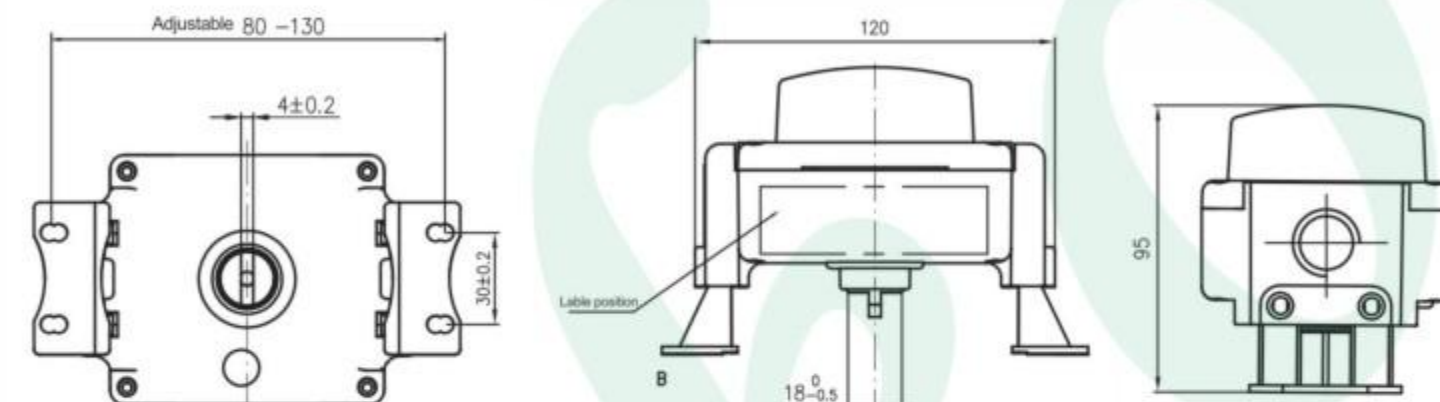


Technical Parameters

Item/Model	APL230 Series Valve Limit Switch boxes	
Housing Material	Polyamides Bottom with Polycarbonate Top Cover	
Housing Color	Black Bottom with Transparent Cover	
Switch Specification	Mechanical Switch (SPDT)×2	5A 250VAC:Ordinary
		16A 125VAC/250VAC:Omron,Honeywell,etc.
		0.6A 125VDC:Ordinary,Omron,Honeywell,etc.
		10A 30VDC:Ordinary,Omron,Honeywell,etc.
Terminal Blocks	8 points	
Ambient Temperature	Common type -20℃ to+80℃,Customizable low temperature type.	
Weather Proof Grade	IP67	
Explosion Proof Grade	Non-explosion Proof	
Mounting Bracket	Optiona Material:Polyamides or Aluminum	
	Optional Model:Refer to Mounting Bracket Selection Table	
Fastener	Optional:Carbon Steel,304 Stainless Steel	
Indicator Lid	Flat Lid	
	Close:Red,Open:Yellow	
Position Indication Color	Close:Red,Open:Green	
	Qty:1 or2	
Cable Entry	Specifications:NPT 1/2	
	4 to 20mA,with 24VDC Supply	
Position Transmitter	4 to 20mA,with 24VDC Supply	
Single Net Weight	0.25 Kgs	
Packing Specifications	1Pcs/Box,40 Pcs/Carton	

DS414 SERIES

Kinko

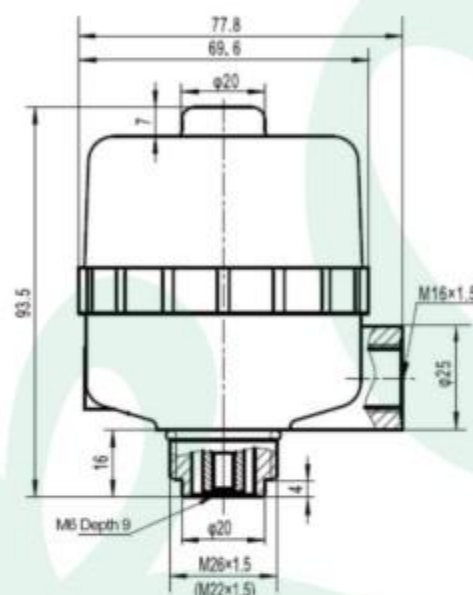


Technical Parameters

Item/Model	DS414 Series Straight Travel Limit Switch For Angle Seat Valve		
Housing Material	Polycarbonate		
Housing Color	Transparent		
Switch Specification	Mechanical Switch (SPDT)×2	16A 125VAC/250VAC:Omron,Honeywell,etc.	
		0.6A 125VDC:Ordinary,Omron,Honeywell,etc.	
		10A 30VDC:Ordinary,Omron,Honeywell,etc.	
	Proximity Switch ×2	≤150mA 8VDC: Intrinsically Safe Ordinary, Intrinsically Safe Pepperl+fuchsNJ2,etc.	
Terminal Blocks	8 points		
Ambient Temperature	Common type -20℃ to+80℃,Customizable low temperature type.		
Weather Proof Grade	IP67		
Explosion Proof Grade	Non-explosion Proof,EXiallCT6		
Position Indication Light	Close:Red,Open:Green		
Cable Entry	Qty:1		
	Specifications:M16,M20,M22,M26,G 1/4"		
Position Transmitter	4 to 20mA,with 24VDC Supply		
Single Net Weight	0.2Kgs		
Packing Specifications	1Pcs/Box,40 Pcs/Carton		

WLCA2-2 SERIES

Kinko

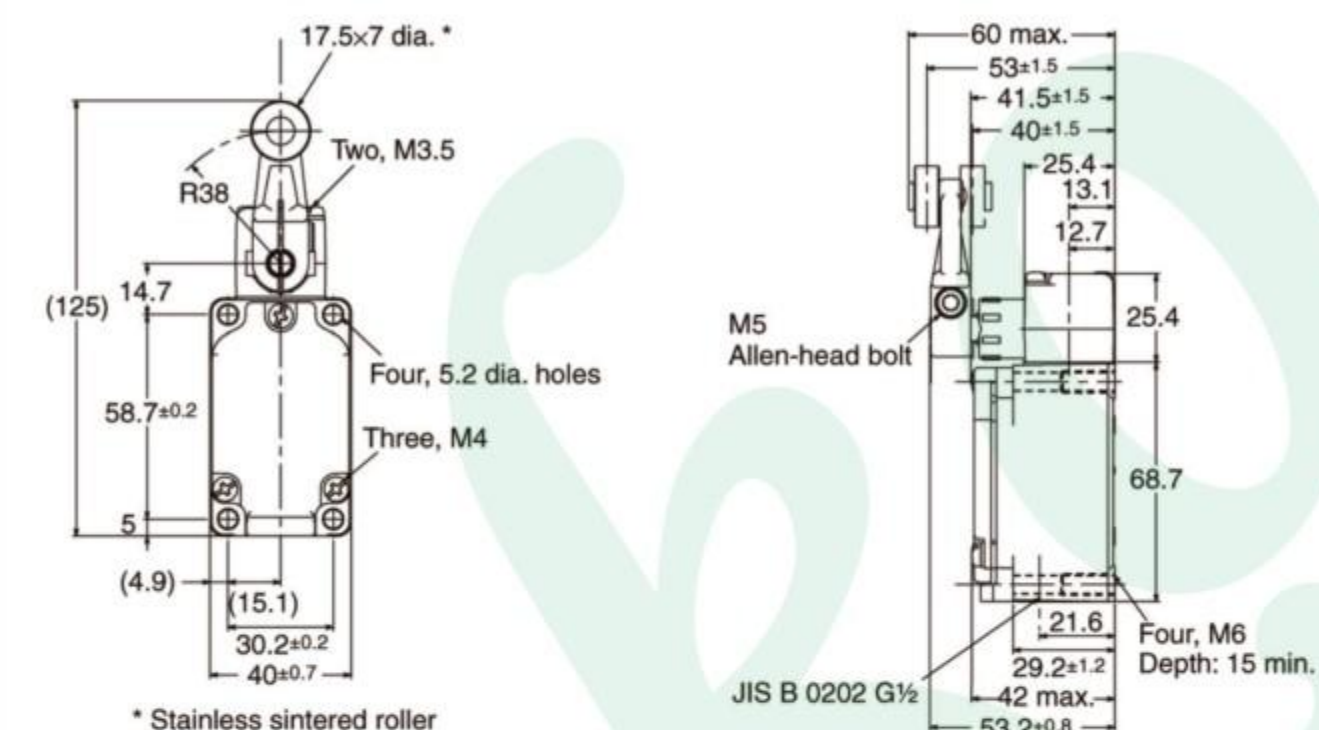


Technical Parameters

Item/Model	WLCA2-2 Series Straight Travel Limit Switch		
Housing Material	Polycarbonate		
Housing Color	Gray		
Switch Specification	10A125VAC/250VAC:Omron		
Ambient Temperature	Common type-20°Cto+80°C,Customizable low temperature type.		
Weather Proof Grade	IP65		
Explosion Proof Grade	Non-explosion Proof		
Cable Entry	Qty:1		
	Specifications:G1/2		
Single Net Weight	0.29 Kgs		
Packing Specifications	100 Pcs/Carton		

DS515 SERIES

Kinko

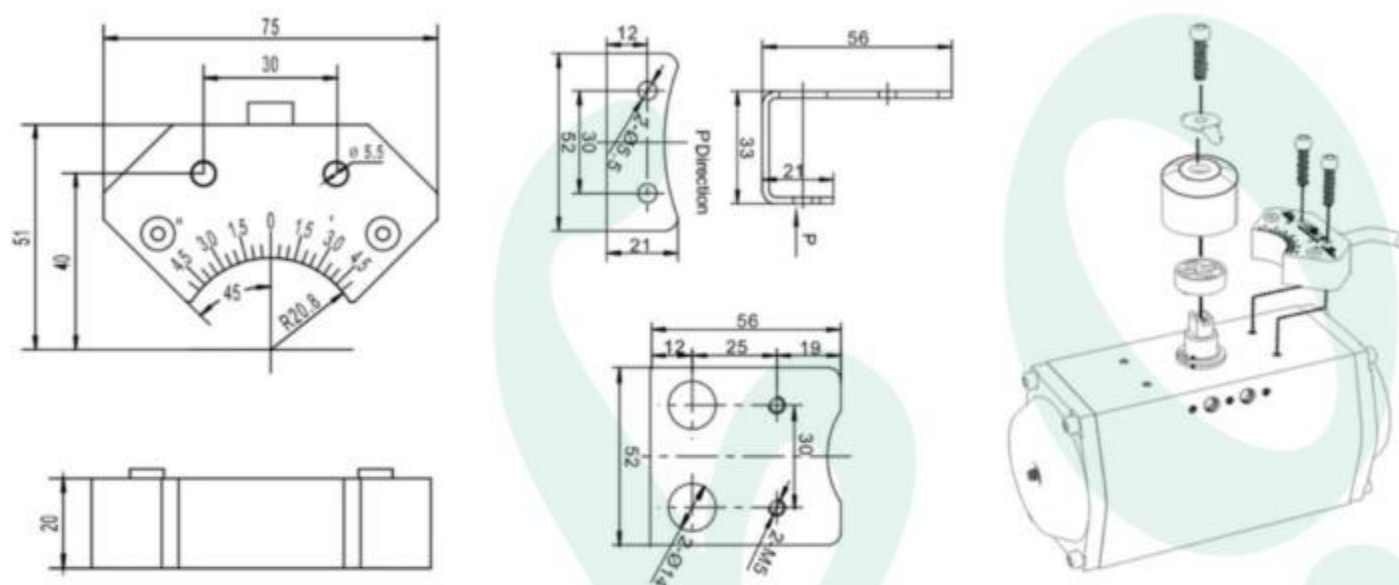

Technical Parameters

Item/Model	DS515 Series Horseshoe Magnetic Induction Limit Switch
Housing Material	Polypropylene
Switch Type	Magnetic induction
Contact Form	NO(Optional NC)
Output Type	2 Wire(Red,Blue;or Yellow,Black)
Rated Power	1W-10W
Working Voltage	5~240 VAC/VDC
Working Current	0 ~ 300 mA
Switching Frequency	0 ~ 4.8 KHz
Sensor Position	-45°/+45°±10°
Operating Temperature	-40°C~+85°C
Sensing Distance	1 ~ 6mm
Weather Proof Grade	IP67
Explosion Proof Grade	Non-explosion Proof
Single Net Weight	0.14 Kgs
Packing Specifications	200 Pcs/Carton

MOUNTING BRACKET SELECTION GUIDE

Kinko

Model	Picture	Material	Size	Applica-tion	Model	Picture	Material	Size	Applica-tion
MBP-001		Carbon Steel or Stainless Steel	W:30 L:80 H:20	DK2XX DS5XX DS6XX	MBP-009		Carbon Steel or Stainless Steel	W:30 L:50 H:30	DK2XX DS5XX DS6XX
MBP-002		Carbon Steel or Stainless Steel	W:30 L:80 H:30	DK2XX DS5XX DS6XX	MBP-010		Carbon Steel or Stainless Steel	W:30 L:80 H:50	DS3XX
MBP-003		Carbon Steel or Stainless Steel	W:30 L:80 H:45	DK2XX DS5XX DS6XX	MBP-011		Carbon Steel or Stainless Steel	W:30 L:80-130 H:40-50	DS3XX
MBP-004		Carbon Steel or Stainless Steel	W:30 L:130 H:40	DK2XX DS5XX DS6XX	MBP-012		Carbon Steel or Stainless Steel	W:30 L:80 H:35-50	DK2XX DS5XX DS6XX DS3XX DS4XX DS4XX-VPX Dk310
MBP-005		Carbon Steel or Stainless Steel	W:30 L:80 H:30-40	DK2XX DS5XX DS6XX	MBP-013		Carbon Steel or Stainless Steel	W:30 L:130 H:35-55	DK2XX DS5XX DS6XX DS4XX DS4XX-VPX Dk310
MBP-006		Carbon Steel or Stainless Steel	W:30 L:130 H:40	DK2XX DS5XX DS6XX	MBP-014		Carbon Steel or Stainless Steel	W:30 L:80-130 H:30-40	DK1XX
MBP-007		Carbon Steel or Stainless Steel	W:30 L:80-130 H:30-40	DK2XX DS5XX DS6XX	MBP-230		Plastic or Aluminum	W:30 L:80 H:20-50	DK230
MBP-008		Carbon Steel or Stainless Steel	W:30 L:80 H:30-40	DK2XX DS5XX DS6XX					

ACCESSORIES

Kinko

Mechanical Switches

Arrangement	Ratings	Service life	Operating frequency
2-SPDT	5A 250VAC 16A 125VAC/250VAC 0.6A 125VDC 10A 30VDC	Min.1,000,000 operations	120 operations/min
2-DPDT	5A 250VAC 16A 125VAC/250VAC 0.6A 125VDC 10A 30VDC	Min.1,000,000 operations	120 operations/min

Proximity Switches

Inductive proximity sensor		Inductive proximity sensor		Inductive proximity sensor	
Voltage range:8.2VDC Sensing range:2mm Ambient temperature :-20~60°C		Voltage range:8.2VDC Sensing range:2mm Ambient temperature:-50~60°C		Voltage range:100mA5~60VDC Sensing range:2mm Ambient temperature:-20~60°C	
Magnetic sensor		Magnetic sensor		Magnetic sensor	
Voltage range:500mA 240VAC/DC Sensing range:3mm		Voltage range:3A 24VDC Sensing range:5mm			

Indicator lid



ORDERING GUIDE FOR LIMIT SWITCH BOXES


Kinko

Basic Parameter	
C1	Explosion Proof Grade
DC6	EXDICT6
DB6	EXDIIBT6
AC6	EXIaIICT6
AC4	EXIaIICT4
Non	None Ex-proof
C2	WEATHER PROOF GRADE
P65	IP65
P66	IP66
P67	IP67
C3	Shell Material
AL	Die-casting Aluminium
S4	Stainless Steel 304
S6	Stainless Steel 316
PA	Polyamides
C4	Series
DS500	
DS300	
WLF6G2	
TPX410	
DS410	
APL310	
APL314	
APL210	
APL230	
DS414	
WLCA2-2	
DS515	


Detailed Parameter	
C5	Mechanical Micro Switches
11	2×SPDT
12	3×SPDT
13	4×SPDT
14	2×SPDT (Low Temperature)
15	2×DPDT
16	2×SPDT+Current Feedback (4~20mA DC24V)
17	2×SPDT(Gold Plating)
C5	Inductive Proximity Micro Switches
21	NBB3-V3-Z4(5~60VDC.Sn=3mm.2 Wire N/O.-25°C~85°C)
22	NJ2-V3-N(Exia IIC T6.8VDC.Sn=2mm.2 Wire N/C.-25°C~100°C)
23	NCB2-V3-NO(Exia IIC T6.8VDC.Sn=2mm.2 Wire N/C.-25°C~100°C)
24	ALPS-24(12~24VDC.≤150mA.Sn=2mm.2 Wire N/O.-25°C~85°C)
25	ALPS-24-P(12~24VDC.≤150mA.Sn=2mm.3 Wire N/O.-25°C~85°C)
26	SFB2-V3-W(Exia IIC T4.8.2VDC.Sn=2mm.2 Wire N/C.-25°C~100°C)
20	Customize according to customer requirements
C6	Micro Switches Brand
CHM	Chinese Brand 1:Mechanical Switches(Max.Power 5A/250VAC)
HWM	America Honeywell:Mechanical Switches(Max.Power 5A250VAC)
OMM	Japan Omron:Mechanical Switches(Max.Power 5A/250VAC)
CHP	Chinese Brand 2:Inductive Proximity Switches
PFP	Germany PEPPERL+FUCHS:Inductive Proximity Switches
C7	Mounting Bracket Model
M**	M**refer to the No.of the Mounting Bracket Selection Table
C8	Mounting Bracket Material
S4	SS304
CS	Carbon Steel
AL	Aluminum
PA	Polyamide
C9	Entry Cable
EC1	G1/4"
EC2	G1/2"
EC3	G3/4"
EC4	NPT1/2"
EC5	NPT3/4"
EC6	M20
EC7	M22
EC8	M25
EC9	M26
C10	Window Indicator
WN1	0~90°,Close:Red,Open:Yellow
WN2	0~90°,Close:Red,Open:Green
WT1	T-type
WL1	L-type
WF1	Fully Transparent
WS1	Straight Travel
C11	Indicator Lid
IC1	Flat Lid
IC2	Dome Lid
C12	Shell Color
SC1	Black
SC2	Gray
SC3	Dark Gray
SC4	Light Gray
SC5	Blue-Green
SC6	Sky blue
SC7	Yellow
SC8	Red
SC9	Orange
SC0	Customizable color

Note:Product Code=(C1-)(C2-)(C3-)C4-C5C6-C7C8-C9-C10-C11-C12


Mechanical Switch (2SPDT)
APL210/ITS100/DS100/APL310/DS300/DS410/DS510

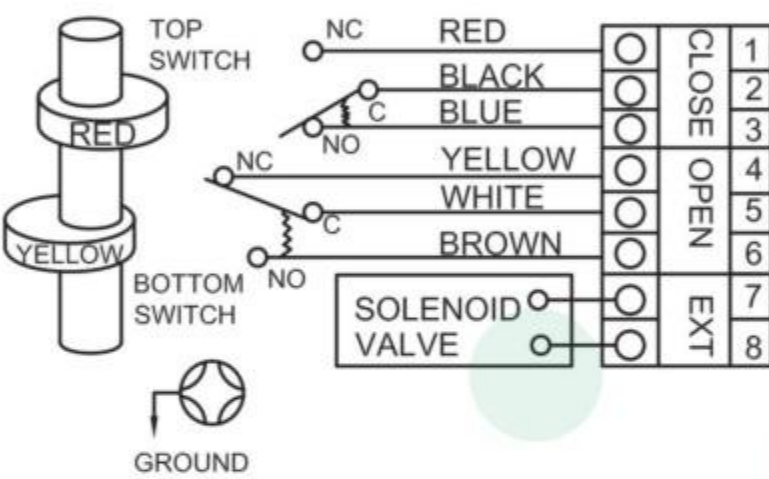


Mechanical Switch (4SPDT)
DS300/APL314/ITS300

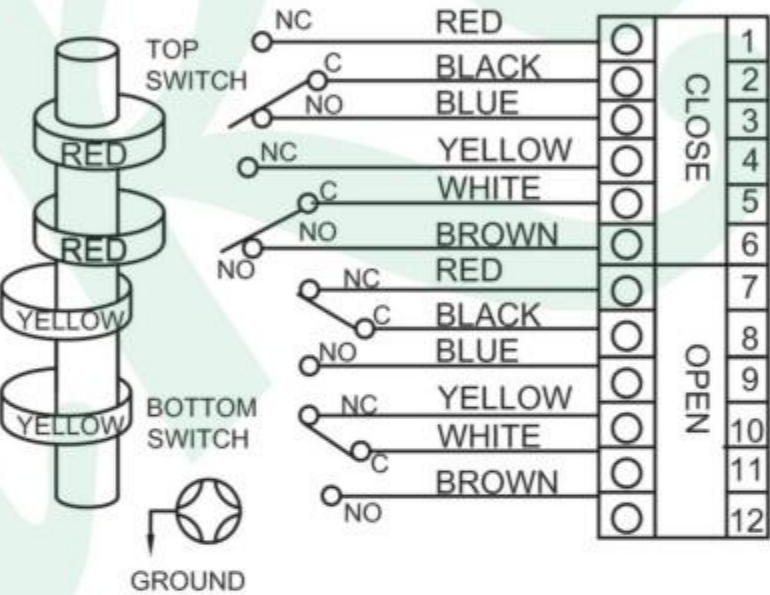


Mechanical Switch (2DPDT)
DS300

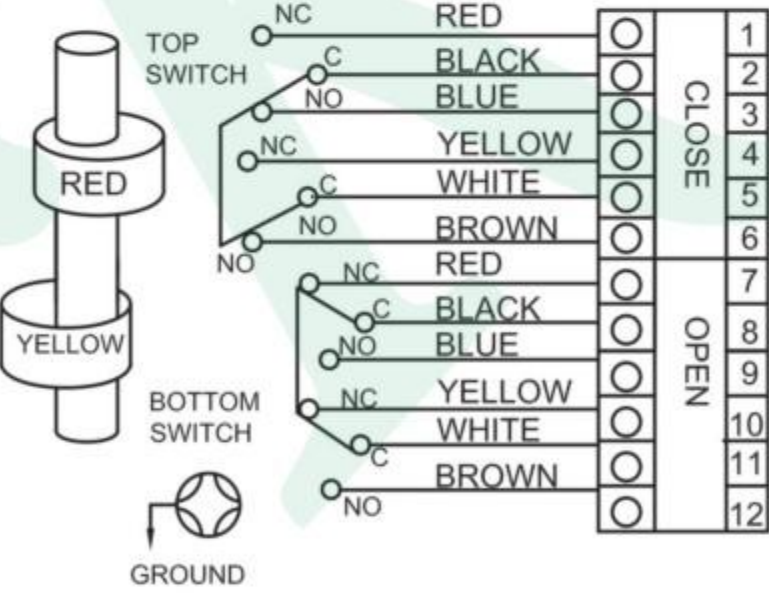


Proximity Switch (2-Wire)
APL220/DS120/DS320/DS420/DS520

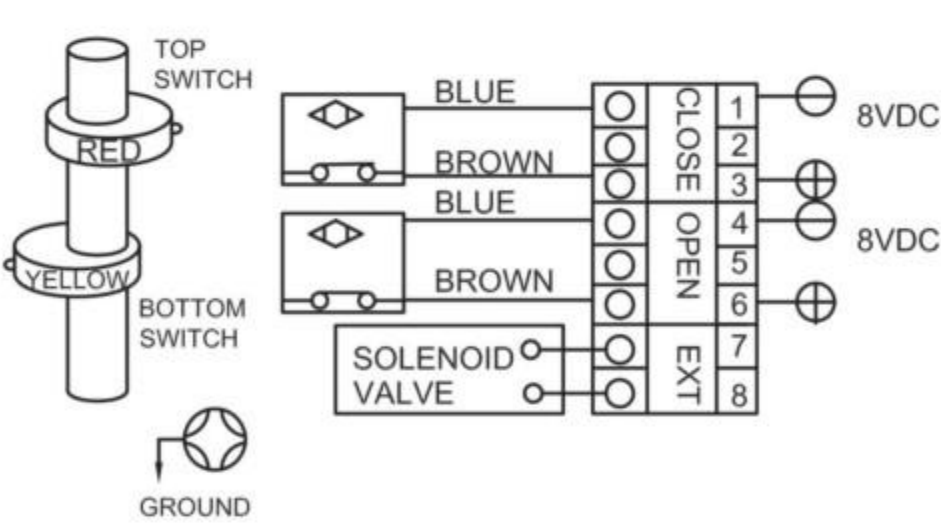


Proximity Switch (3-Wire) NPN NC
APL210/DS100/DS300/DS410/DS500

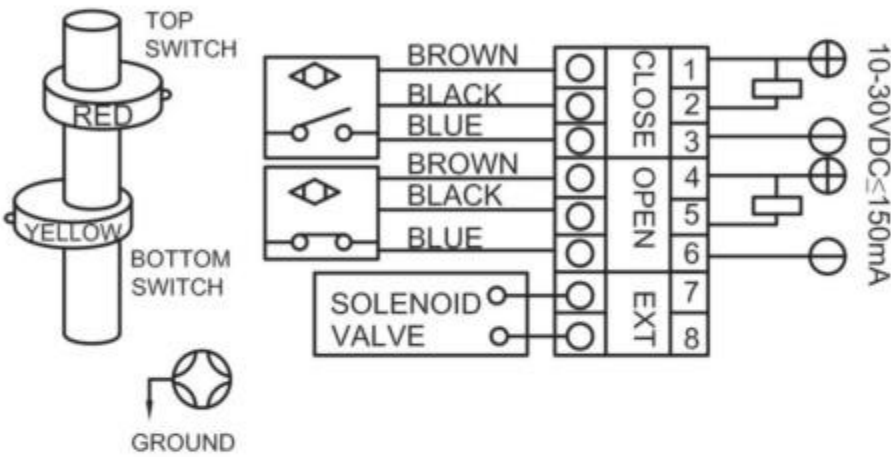


Proximity Switch (2-Wire) NC
APL210/DS100/DS300/DS410/DS500

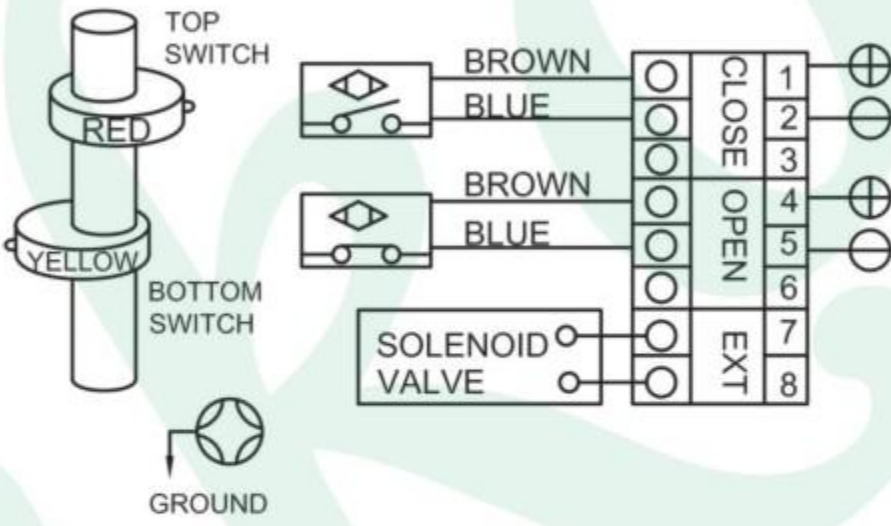


Proximity Switch (3-Wires) PNP NO
APL210/DS100/DS300/DS410/DS500

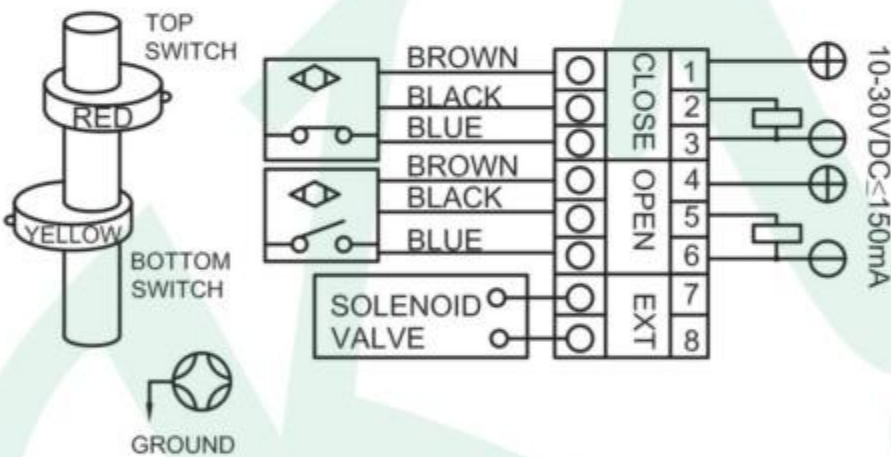

Proximity Switch (3-Wire) NPN NO
APL210/DS100/DS300/DS410/DS500

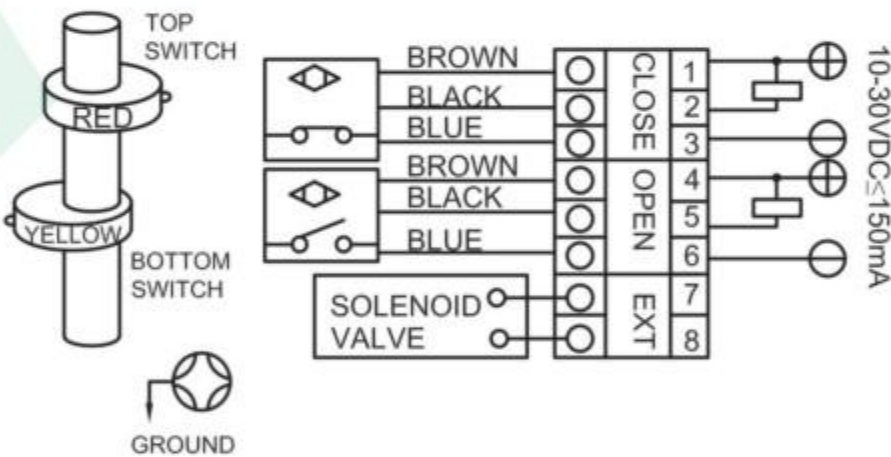

Proximity Switch (3-Wires) PNP NC
APL210/DS100/DS300/DS410/DS500

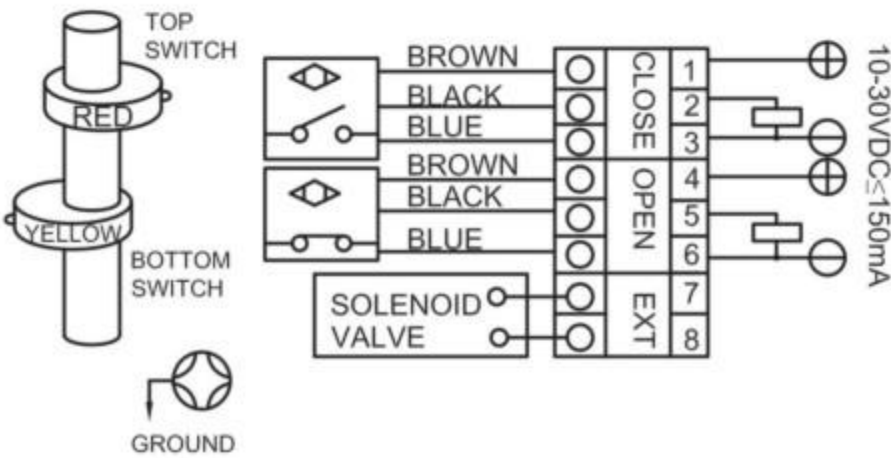

KK900 SERIES POSITIONER

Kinko



Overview

The KK900 Intelligent Valve Positioner is an intelligent valve positioner based on piezoelectric valve technology. It can receive 4~20mA instructions from the central control room and control the valve position to the specified location. The actuation method can be single-acting (spring return) or double-acting (air open/close). The positioner is a two-wire instrument that obtains power supply voltage from the 4~20 mA input signal.

Feature

- Simple installation with automatic initialization (range and zero point adaptive adjustment)
- Easy operation: local operation and configuration via three buttons and dual-line display
- Online adaptive program ensures high-quality control
- Extremely low air consumption during steady-state operation, negligible
- "Tight closing" function (ensures maximum seating pressure on the valve seat)
- Numerous functions can be achieved through simple configuration, e.g., setting characteristic curves and limits
- Same device model for both linear and rotary actuators
- Few moving parts, insensitive to vibration

Technical Parameters

Item Type	KK900
Operation Temperature	-30~80℃
Explosion Proof Form	Ordinary type, intrinsic safety type
Input Signal	DC4~20mA
Stroke	10~200mm or 0~120 °C
Gas Source	Pressure 0~0.6Mpa; No oil, no moisture, no dust or dirt
Impedance	Less than 450Ω
Air Connection	NPT1/4
Electrical Interface	NPT1/2、G1/2
Output Characteristic	Linear, equal percentage (1:25, 1:5025:1, 50:1), customizable
Linearity	±0.5%FS.
Repeatability	±0.4%FS.
Sensitivity	±0.5%FS.
Material	die-casting aluminum
Protection Grade	IP66
Weight	1.8Kg
Size	218x105x118mm length x width x height

Ordering Code

KK900	
Model	
Functional Type	0 Standard 1 Valve feedback 2 HART 3 Valve position feedback+HART
Action form	L Direct travel R Angular travel
Acting Type	S Single D Double
Explosion Proof	n Common i Intrinsically safe type
Electrical Interface	1 G1/2 2 NPT1/2 3 M20x1.5
Fault Location	1 Reset 2 Keeping positions
Limit Switch	1 Without limit switch 2 Equipped with limit switch

IP8081/IP8181 SERIES POSITIONER

Kinko



IP8081

IP8181-03d

Technical Parameters

Item Type	IP8081/IP8181	
	Single	Double
Basic Error	±1%	±2%
Return Difference	1%	2%
Dead Zone	0.4%	0.8%
Rated Travel	0~(10~100) mm [Angular travel (angular travel) 0~(50 °~90 °)]	
Minimum Operating Current	3.8mA.DC	
Voltage	9~36V.DC	
Maximum Supply Power	0.2W	
Air Pressure	0.14 ~ 0.7MPa	
Input Signal	4~20mA.DC (conventional) two-wire system	
Output Pressure	0.02~0.5MPa	
Gas Consumption	5L/min (gas supply 0.14MPa)	11L/min (gas supply 0.7MPa)
Output Characteristic	linear	
Ambient Temp.	The room temperature type is -20 °C~+60 °C	
Relative Humidity	5%~100%	
Explosion Proof Type (grade)	Explosion proof type (Ex db IIC T6 Gb, Ex tb IIIC T80 °C Db)	
Supply Impedance	4~20mA.DC/500Ω(20mA)	
Air Connection	NPT1/4 (conventional) G1/4	
Exterior Material	NPT1/2 (conventional), G1/2, M20 × 1.5	
Power Interface	Aluminum alloy spraying process treatment	
External Dimensions	Explosion proof type: 266 × 145 × 110 (mm) (length × width × height)	
	Normal type: 218 × 162 × 106 (mm) (length × width × height)	
Weight	Explosion proof type: about 3.3 kg, ordinary type: about 2.3 kg	

Overview

The IP8081/IP8181 intelligent electrical valve positioner is an intelligent two-wire field instrument based on microprocessor technology. It is a high-performance electrical valve positioner that can effectively overcome frictional forces and unbalanced forces on the valve core, improve the response speed of the regulating valve, and enable rapid and accurate positioning; It has functions such as changing control type, setting split range control, setting closed function, changing valve stroke distance, adjusting packing friction coefficient, setting valve type, and 4~20mA valve position feedback. It is used in conjunction with traditional mechanical electrical valve positioners, making the installation and debugging of valve positioners more convenient, with lower maintenance costs and higher control accuracy.

Feature

- High positioning accuracy, up to 0.5% FS;
- Easy to operate, generally only one click is needed to complete the setting.
- It has explosion-proof function, safe and reliable performance;
- Automatic tuning, automatic diagnosis;
- Good seismic performance
- Long term use will not cause zero drift problems like mechanical locators;
- Low power consumption, low-cost operation;
- Adopting a two-wire 4~20mA standard signal.

Ordering Code

IP8 8	
Model	
Output Stroke	0 Direct travel 1 Angular travel
Feedback Signal	1 Equipped with PTM output
Acting Type	S Single D Double
Explosion Proof	n Non-Explosion i Ex db IIC T6 Gb,Ex tb IIIC T80°C Db

YT-1000L SERIES POSITIONER

Kinko



Overview

The electric valve positioner YT-1000L is a device that receives a 4~20mA DC current signal from a controller or control system and delivers air to a pneumatic actuator to control valve opening.

Feature

① No resonance phenomenon within the range of 5~200Hz; ② Positive and negative effects, and easy conversion between single and double effects; ③ For the vibration generated by small actuators, it can be solved by adding a throttle hole to the locator. ④ Low air consumption, good economy, ⑤ can achieve split range control within 1/2 range without replacing parts.

Technical Parameters

Item Type	YT-1000L	
	Single	Double
Input Signal	4~20mA DC	
Impedance	250±15 Ohm	
Supply Pressure	0.14~0.7Mpa(1.4~7bar)	
Stroke	10~150mm	
Air Connection	NPT1/4 (conventional) G1/4、PT1/4	
Gauge Connection	PT 1/8	
Conduit	NPT1/2 (conventional), G1/2, M20 × 1.5	
Explosion Proof	NEPSI ExiallCT6Ga ,ExdbllCT6Gb,ExtblllCT80°CDb	
Enclosure	IP66	
Ambient Temp.	Room temperature type is -20~60 °C	
Linearity	±1.0% FS	±2.0% FS
Hysteresis	±1.0% FS	
Sensitivity	±0.2% FS	±0.5% FS
Repeatability	±0.5%FS	
Air Consumption	2.5LPM (Sup=0.14Mpa)	
Flow Capacity	80LPM (Sup=0.14Mpa)	
Material	Aluminum Diecasting	
Weight	2.7kg(6.1lb)	

Ordering Code

YT-1000L	
Model	
Acting Type	
S Single	
D Double	
Explosion Proof	
n Non-Explosion	
i ExiallCT6Ga	
d ExdbllCT6Gb	
ExtblllCT80°CDb	
Lever Type	
1 10~40mm	
2 30~70mm	
3 60~100mm	
4 100~150mm	
Orifice Type	
1 Φ0.7	
2 Φ1	
3 None	
Connection Type	
1 PT	
2 NPT	
Ambient Temp.	
S -20°C~60°C	
H -20°C~120°C	
L -40°C~60°C	
Option	
0 None	
1 +L/S (built-in non explosion proof type)	
2 +PTM (built-in non explosion proof type)	
3 +PTM with LCD (built-in non explosion proof type)	

YT-1000R SERIES POSITIONER

Kinko



External explosion-proof
L/S type



External non explosion proof
L/S type



External explosion-proof
PTM type



External explosion-proof
PTM+L/S type

Overview

The electric valve positioner YT-1000R is a device that receives a 4~20mA DC current signal from a controller or control system and delivers air to a pneumatic actuator to control valve opening.

Feature

① There is no resonance phenomenon within the range of 5~200Hz. ② Positive and negative effects, as well as single and double effects, can be easily converted. ③ For the vibration generated by small actuators, it can be solved by adding a throttle hole to the locator.④ Low air consumption and good economy. ⑤ It is possible to achieve split range control within 1/2 range without replacing parts.

Technical Parameters

Item Type	YT-1000R	
	Single	Double
Input Signal	4~20mA DC	
Impedance	250±15 Ohm	
Supply Pressure	0.14~0.7Mpa(1.4~7bar)	
Stroke	0~90°	
Air Connection	NPT1/4 (conventional) G1/4、PT1/4	
Gauge Connection	PT(NPT)1/8	
Conduit	NPT 1/2、G1/2、M20×1.5	
Explosion Proof	NEPSI ExiallCT6Ga ,ExdbllCT6Gb,ExtblllCT80°CDb	
Enclosure	IP66	
Ambient Temp.	Room temperature type is -20~60 °C	
Linearity	±1.0% FS	±2.0% FS
Hysteresis	±1.0% FS	
Sensitivity	±0.2% FS	±0.5% FS
Repeatability	±0.5%FS	
Air Consumption	2.5LPM (Sup=0.14Mpa)	
Flow Capacity	80LPM (Sup=0.14Mpa)	
Material	Aluminum Diecasting	
Weight	2.8kg(6.2lb)	

Ordering Code

YT-1000R	
Model	
Acting Type	
S Single	
D Double	
Explosion Proof	
n Non-Explosion	
i ExiallCT6Ga	
d ExdbllCT6Gb	
ExtblllCT80°CDb	
Lever Type	
1 M6 x34L	
2 M6x63L	
3 M8x34L	
4 M8 x63L	
5 NAMUR	
Orifice Type	
1 Φ0.7	
2 Φ1	
3 None	
Connection Type	
1 PT	
2 NPT	
Ambient Temp.	
S -20°C~60°C	
H -20°C~120°C	
L -40°C~60°C	
Option	
0 Standard indicator	
1 Dome indicator	
Option	
0 None	
1 +PTM (built-in non explosion proof type)	
11 +PTM with LCD display (built-in non explosion proof type)	
2 +PTM (External Explosion proof Type)	
21 +PTM with LCD display (external explosion-proof type)	
3 +L/S (built-in non explosion proof type)	
4 +L/S (external explosion-proof type)	
5 +PTM+L/S (built-in non explosion proof type)	
6 +PTM+L/S (external explosion-proof type)	

IP8000/IP8100 SERIES POSITIONER



IP8000



IP8100

Technical Parameters

Item Type	IP8000/IP8100	
	Single	Double
Basic Error	±1%	±2%
Return Difference	1%	2%
Dead Zone	0.4%	0.8%
Rated Travel	0~(10~100) mm [Angular travel (angular travel) 0~(50°~90°)]	
Gas source pressure	0.14 ~ 0.7MPa	
Input Signal	4~20mA.DC (conventional); 0 ~ 10 mA.DC, 4 ~ 12 mA.DC,12 ~ 20 mA.DC,0 ~ 5 mA.DC, 5 ~ 10mA.DC	
Output Pressure	0.02-0.5MPa	
Gas Consumption	Single Actuator	5L/min (gas supply 0.14MPa)
	Double Actuator	11L/min (gas supply 0.7MPa)
Output Characteristic	Linearity	
Ambient Temp.	The room temperature type is -20 °C~60 °C	
Relative Humidity	5% ~ 100%	
Explosion Proof	Explosion proof type (ExdbII BT6Gb); Inherent Safety Type (Exiall CT6Ga)	
Supply Impedance	4~20mA.DC/240 ± 10 Ω (at 20 °C); 0~10mA.DC/950 ± 30 Ω (at 20 °C); (4~20mA is intrinsic safety crack)	
Air Connection	NPT1/4 (regular) G1/4	
Conduit	NPT1/2 (conventional), G1/2, M20 × 1.5	
Exterior Material	Aluminum alloy spraying process treatment	
External Dimensions	218 × 162 × 100 (mm) straight stroke 251 × 162 × 100 (mm) angular travel (length × width × height)	
Weight	About 2.4kg (without junction box) 2.6kg (with junction box)	

Overview

The IP8000 electrical valve positioner is used in conjunction with the actuator. It receives a 4~20mA.DC current signal from the controller or control system, converts it into air pressure, and sends it to the corresponding pneumatic actuator to control the position of the valve.

Feature

- ① There is no resonance phenomenon within the range of 5-200HZ, and both positive and negative effects can be easily converted between single and double effects.
- ③ For small actuators, vibration can be prevented by reducing the throttle of the locator.
- ④ Low air consumption and good economy.
- ⑤ It is possible to achieve split range control within 1/2 range without replacing parts.

Ordering Code

IP8				
Model				
Output Stroke				
000	Direct travel			
100	Angular travel			
Acting Type				
01	Single			
03	Double			
Explosion Proof				
n	Non-Explosion			
d	ExdbII BT6Gb			
i	Exiall CT6Ga			
Feedback Method				
F	Built in feedback non explosion proof			

Kinko

KK700 SERIES POSITIONER



Overview

The KK700 electrical valve positioner converts the 4~20mA DC signal from the regulator or computer IO port into pneumatic force and drives the regulating valve to achieve angular or linear displacement through a single acting or double acting cylinder. Furthermore, closed-loop control is achieved through a cam feedback system, allowing the regulating valve to achieve precise angular or linear displacement proportional to the input signal.

Technical Parameters

Input Signal	Standard: 4~20mA DC 0~20mA DC Split range: 4~20mA DC 12~20mA DC
Input Impedance	220Ω±10Ω
Air supply pressure	0.14 ~ 0.8Mpa
Rated travel	Straight stroke: 12~140mm Turning angle: 0~95°
Wire connector	NPT1/2
Air Connection	NPT1/4
Ambient Temp.	-20°C~60°C
Environmental temperature impact	≤0.05% °C
Gas consumption	0.5m3n/h matched with actuator servo slide valve with diameters of Φ 4 and Φ 6
In the executing agency	Dead zone: ≤ 0.4%
The load is relatively stable	Lag:<0.7%
Timed performance	Linear:<± 1%
Vibration effect	(1.5g-100Hz)≤1%
Incoming interface	NPT1/2 or M20 × 1.5
Applicable cables	Φ5~Φ10
Tracheal interface	NPT 1/4
Weight	3.5kg

Ordering Code

KK7				
Model				
Explosion Proof				
2	Basic type			
Acting Type				
0	Single Reaction			
1	Single Action			
2	Double Reaction			
3	Double Action			
Travel itinerary				
A	Angular travel			
B	Direct travel			
Connection form				
U	Angular travel U-shaped			
H	Angle stroke H-type			
X	Basic straight travel type			
S	Straight stroke extended type			
Feedback method				
F	With signal feedback			
0	None			
LS	Equipped with limit switch			

Kinko

EP4000 SERIES POSITIONER

Kinko



Overview

The EP4000 series electrical valve positioner is used in conjunction with pneumatic actuators, with an input signal of 4~20mADC converted to output air pressure to control the action of the actuator. At the same time, feedback is provided based on the stroke of the execution structure, so that the stroke of the execution structure can control the signal for precise positioning.

Feature

① Suitable for small and large capacity actuators; ② Low gas consumption; ③ You can choose output characteristics; ④ By replacing the cam mechanism, the conversion between straight and angular travel can be achieved.

Technical Parameters

Item Type	Direct travel		Corner travel	
	Single	Double	Single	Double
Input Signal	4~20mA.DC (divisible)			
Input Impedance	250Ω ± 5% (at 25%)			
Gas source pressure	0.14 ~ 0.7MPa			
Output pressure	0 ~ 0.7MPa			
rated travel	0 ~ 60mm		0 ~ 90°	
Linearity	≤±1.0%		≤±1.5%	
Sensitivity	≤0.1%		≤0.2%	
Hysteresis	≤0.5%		≤0.8%	
Repeatability	≤0.2%		≤0.3%	
Air Connection	NPT 1/4			
Electrical interface	NPT 1/2			
Explosion Proof	ExdbII BT6Gb,ExialCT6Ga			
Ambient Temp.	-20℃~60℃			
Humidity range	10 ~ 90%RH			
Gas consumption	5L/min	15L/min	175L/min	400L/min
Exterior Material	Gas supply 0.14MPa	Gas supply 0.4MPa	Gas supply 0.14MPa	Gas supply 0.4MPa
Pressure gauge	Stainless steel shell			
Output characteristics	Linear (standard type)			
Housing material	Cast aluminum alloy			
surface coating	Powder coating			
Weight	2.3kg			

Ordering Code

EP4

Model

Explosion Proof

1

Explosion proof d Exdb II BT6 Gb

2

Not explosion-proof n

3

Intrinsic safety i Exia II CT6 Ga

Travel Itinerary

1

Direct travel

2

Angular travel

Acting Type

1

Single

2

Double

Feedback Method

PTM

+PTM

(built-in non explosion proof type)

HEP(EPP) SERIES POSITIONER

Kinko



Overview

The HEP (EPP) electrical valve positioner can convert the electrical signal output by the regulating device into a pneumatic signal to drive the regulating valve action, and has a valve positioning function, which overcomes the friction force of the valve stem, cancels out the balance force caused by the pressure change of the regulated medium, so that the valve opening corresponds to the control signal output by the regulating device, achieving correct positioning.

Ordering Code

HEP 1

Acting Type

5

ExdbIICT6 Gb

6

ExiallCT4 Ga

7

Non-Explosion

Feedback rod

125

0~60

126

0~100

Option

0

None

1

+PTM (built-in non explosion proof type)

Technical Parameters

Input Signal	Standard: 4~20mADC Split range: 4~12mADC 12~20mADC
Input Impedance	250Ω(4~20mADC)
Air supply pressure	0.14~0.35MPa
Rated travel	Straight stroke: 12~100mm
Wire connector	NPT1/2、G1/2、M20×1.5
Air Connection	NPT1/4
Ambient Temp.	-20°C~60°C
Relative temperature	≤90%
return difference	Less than 1% of the entire journey
Dead zone	Less than 0.4% of the entire journey
Performance	Linear (can be changed to fast open, equal percentage characteristics)
Gas consumption	5L/min (when the gas source pressure is 0.14MPa)
Traffic volume	140L/min (when the gas source pressure is 0.14MPa)
Weight	3.5kg

Ordering Code

EPP 1

Model

Input Signal

1

4~20mADC

2

0~10mADC

4

4~12mADC, 12~20mADC

Acting Type

1

Direct Action

2

Reaction

Travel Itinerary

1

Linear

2

Equal percentage

3

Quick open

Air Supply Pressure

A

0.14~0.16MPa

B

0.17~0.5MPa

Feedback Method

d

ExdbII CT6 Gb

i

Exiall CT4 Ga

0

Non-Explosion

Supporting Facilities

AS

Equipped with a combined pressure reducer

YT-1200 SERIES POSITIONER

Kinko



YT-1200R



YT-1200L

Overview

The pneumatic valve positioner YT-1200 is a device that receives pressure signals ranging from 3 to 15PSi from a pneumatic controller or control system, and controls valve position by operating pneumatic actuators.

Feature

① Small and precise structure; ② Forward and reverse, easy conversion between single acting and double acting; ③ For small-sized pneumatic actuators, vibration can be prevented by reducing the throttle hole of the locator; ④ Low air consumption and good economy; ⑤ No need to replace parts, simple operation can achieve split range control within 1/2 range.

Technical Parameters

Item Type	YT-1200L		YT-1200R	
	Single	Double	Single	Double
Input Signal	0.2 ~ 1kgf/cm ² (3 ~ 15psi)			
Supply Pressure	1.4 ~ 7kgf/cm ² (20 ~ 100psi)			
Stroke	10 ~ 150mm		0 ~ 90°	
Air Connection	NPT 1/4			
Gauge Connection	NPT 1/8			
Ambient Temp.	-20°C~60°C			
Linearity	±1%F.S.	±2%F.S.	±2%F.S.	
Hysteresis	±1%F.S.			
Sensitivity	±0.2%F.S.	±0.5%F.S.	±0.5%F.S.	
Repeatability	±0.5%F.S.			
Air Connection	2.5LPM (Sup.=1.4kgf/cm ² ,20psi)			
Flow Capacity	80LPM (Sup.=1.4kgf/cm ² ,20psi)			
Material	Aluminum Diecasting			
Weight	1.7kg(3.11b)			

Ordering Code

YT-1200				
Model				
Travel Itinerary				
L Direct travel				
R Angular travel				
Acting Type				
L Single				
R Double				
Lever Type				
Direct travel				
1 10~40mm				
2 30~70mm				
3 60~100mm				
4 100~150mm				
Angular travel				
1 M6×34L				
2 M6×63L				
3 M8×34L				
4 M8×63L				
5 NAMUR				
Orifice Type				
1 0.7				
2 1				
3 None				
Connection Type				
1 PT				
2 NPT				
Ambient Temp				
S -20°C~60°C				
H -20°C~120°C				
L -40°C~60°C				

YT-200/205 SERIES

Kinko



YT-200



YT-205

Overview

The various types of filter pressure reducers produced by our company are specially designed and produced according to the needs of our production site in China. It is more progressiveness in terms of greater output flow and more accurate stability. Widely used in self-control systems, especially suitable for filtering and reducing pressure of air sources for electrical converters, valve positioners, various pneumatic instruments, and actuators.

Feature

① Exquisite craftsmanship, intricate structure, and beautiful appearance. ② Pure filtration, equipped with PE microporous filter element, can be repeatedly used. ③ Aluminum alloy castings undergo anodizing treatment and surface spraying, making them sturdy, aesthetically pleasing, and corrosion-resistant. ④ The material of the key joint is stainless steel. ⑤ Easy and effective sewage discharge. ⑥ Integrated with the electrical converters and valve positioners produced by our factory, they are shipped together, making installation more convenient and the structure more exquisite and beautiful.

Technical Parameters

	YT-200		YT-205	
Item Type	A	B	A	B
Maximum input pressure	15kgf/cm ² (231psi)		15kgf/cm ² (231psi)	
Maximum output pressure	4.2kgf/cm ² (57psi)	8.4kgf/cm ² (120psi)	4.2kgf/cm ² (57psi)	8.4kgf/cm ² (120psi)
Air Connection	NPT(PT1/4)			
Gauge Connection	NPT(PT1/4)			
Ambient Temp.	-20 °C~70 °C (normal temperature)		-20 °C~120 °C (high temperature)	-40 °C~70 °C (low temperature)
Minimum filter size	5 microns			
Material	Aluminum Diecasting		Stainless Steel	
Weight	0.6kg(1.71lb)		1.4kg(3.0lb)	

Ordering Code

YT-200/205				
Model				
Adjustment Range				
A 0~0.42Mpa				
B 0~0.84Mpa				
Connection Form				
P PT				
N NPT				
Pressure Gauge				
0 None				
1 0~0.4Mpa				
2 0~1.0Mpa				
Ambient Temp				
1 -20~70°C				
2 -20~120°C				
3 -40~70°C				
Option				
1 Manual drainage				

4M SERIES (5/2 WAY)

Kinko

Kinko



Features

- Internally piloted structure
- Structure in sliding column mode: good tightness and sensitive reaction
- Double control solenoid valves have memory function
- Internal hole adopts special processing technology which has little attrition friction, low start pressure and long service life
- No need to add oil for lubrication
- Install in the side plate with the surface upward, which can be used by directly connecting with the actuators
- Affiliated manual devices are equipped to facilitate installation and debugging
- NAMUR standard mounting method.

Certificate and approvals

- EAC (TR CU 010/2011, TR CU 020/2011)

Technical Parameters

Model	4M210-08	4M310-08	4M310-10
	4M220-08	4M320-08	4M320-10
Materia of body	Aluminum alloy		
Fluid	Air (to be filtered by 40μm filter element)		
Acting	Internal pilot		
Valve type	5 port 2 position (5/2 way)		
Operating pressure	0.15~0.8 Mpa (21~114 psi)		
Proof pressure	1.2 Mpa (175 psi)		
Temperature	-20~+70°C		
Lubrication [note 1]	Not required		
Max. frequency [note 3]	5 cycle/sec (4M2 series)	4 cycle/sec (4M3 series)	
Port size [note 2]	In=1/4" Out=1/8"	In=Out=1/4"	In=3/8" Out=1/4"
Orifice size CV [note 4]	4M210-08, 4M220-08: 17.0mm ² (CV=1.0)	4M310-10, 4M320-10: 20.0mm ² (CV=1.65)	
Weight	4M210:220g 4M220:320g	4M310:310g	4M320:400g

[note 1] Once lubricated air is used, continue with same medium to optimise valve lifespan. Lubricants like ISO VG32 or equivalent are recommended.

[note 2] PT thread, G thread and NPT thread are available.

[note 3] The maximum actuation frequency is in the no-load state.

[note 4] Equivalent orifice S and Cv are all calculated from the flow rate data.

Coil Specification

Model	4M210, 4M220, 4M310, 4M320				
Standard voltage	AC220V	AC110V	AC24V	DC24V	DC12V
Power consumption	4.5VA	4.5VA	5.0VA	3.0w	2.5w
Scope of voltage	AC: ±15%, DC: ±10%				
Protection grade	IP 66				
Temperature classification	B Class				
Electrical entry	Terminal				
Activating time	0.05sec and below				

Ordering Code

KK-4 M 3 10 08 0V W3 □ □ S

Model

Solenoid valve
NAMUR
STANDARD

Valve body type

M: Plate-type connection

Code

2: 2 Series
3: 3 Series
4: 4 Series

Valve type

10: Single coil
20: Double coil

Electrical entry

08: 1/4"
10: 3/8"

Standard voltage

0V: 24VDC
1V: 110V
2V: AC220V

Power

W3: ≤3W
W4: ≤4W
W6: ≤5W



Cu Zn < 1%

Empty: Conventional
NX: Cu Zn < 1%


Environmental temperature

S: -20~60°C
L: -40~60°C


Product Dimension Drawing

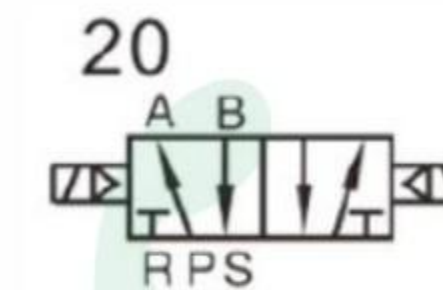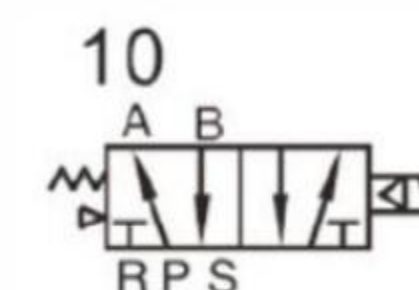


Dimensions

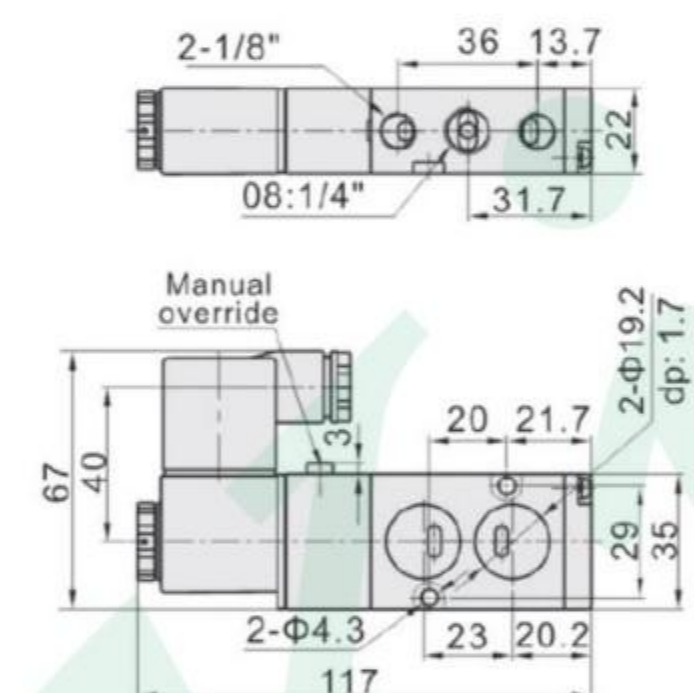


4M210

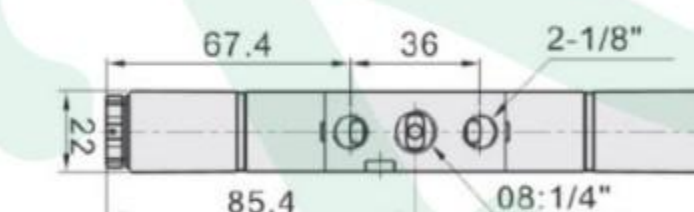

4M220

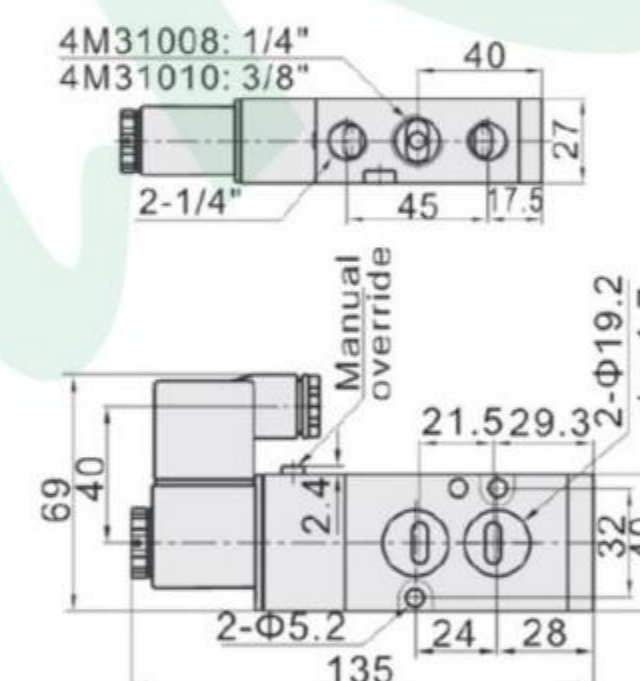

4M310

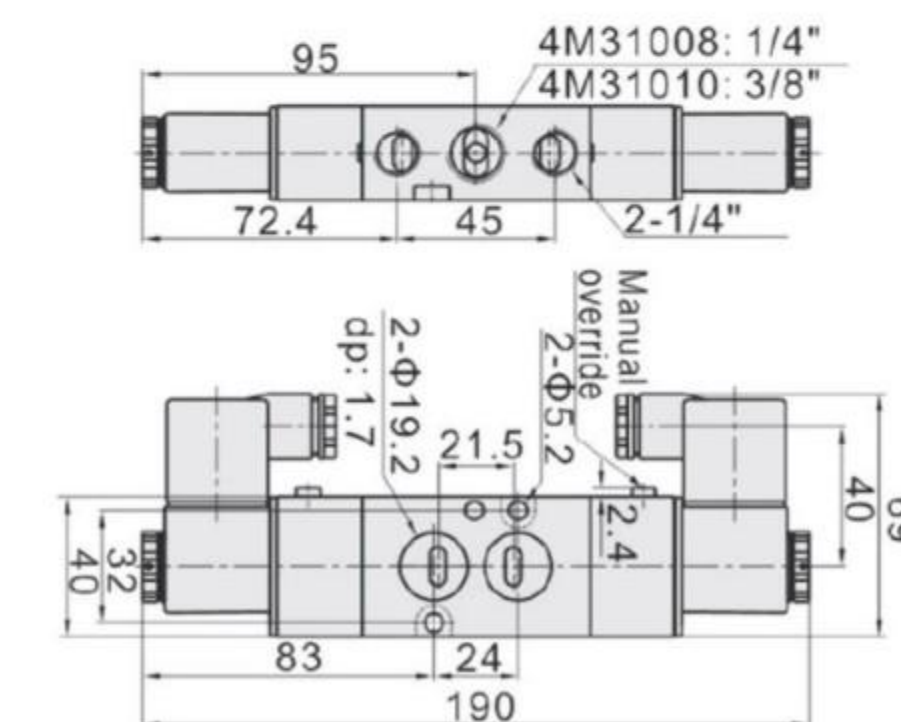

4M320

KK-4V210/220-08 SERIES(5/2 WAY)

Kinko

Kinko



Features

- Pilot-oriented mode:Internal pilot
- Structure in sliding column mode:good tightness and sensitive reaction
- Double control solenoid valves have memory function
- Internal hole adopts special processing technology which has little attrition friction, low start pressure and long service life
- No need to add oil for lubrication
- Several standard voltage grades are optional
- Integrate with the manifold to save installation space

Certificate and approvals

- EAC(TR CU 010/2011,TR CU 020/2011)

Technical Parameters

Model	KK-4V210-08	KK-4V220-08
Material of body	Aluminum alloy	
Fluid	Air(to be filtered by 40μm filter element)	
Acting	Internal pilot	
Valve type	5 port 2 position(5/2 way)	
Operating pressure	0.15~0.8 Mpa (21~114 psi)	
Proof pressure	1.2 Mpa(175 psi)	
Temperature	-20~70°C	
Lubrication[note 1]	Not required	
Max.frequency[note 3]	5 cycle/sec	
Port size[note 2]	In=Out=1/4"Exhaust=1/8"	
Orifice size CV[note 4]	17.0mm ² (CV=1.0)	

[[note 1](#)]Once lubricated air is used,continue with same medium to optimise valve lifespan.Lubricants like ISO VG32 or equivalent are recommended.

[[note 2](#)]PT thread,G thread and NPT thread are available.

[[note 3](#)]The maximum actuation frequency is in the no-load state.

[[note 4](#)]Equivalent orifice S and Cv are all calculated from the flow rate data.

Coil Specification

Model	4V210-08,4V220-08				
Standard voltage	AC220V	AC110V	AC24V	DC24V	DC12V
Power consumption	4.5VA	4.5VA	5.0VA	3.0w	2.5w
Scope of voltage	AC:±15%,DC:±10%				
Protection grade	IP 66				
Temperature classification	B Class				
Electrical entry	Terminal				
Activating time	0.05sec and below				

Ordering Code

KK-4 V 2 10 08 0V W3 □ □ S

Model
Solenoid valve
NAMUR
STANDARD

Valve body type
V:Thin valve body,
pipe connection
Single electronic
control

Code
2:2 Series

Valve type
10:Single coil
20:Double coil

Electrical entry
08:1/4"
10:3/8"


Standard voltage
0V:24VDC
1V:110V
2V:AC220V

Power
W3:≤3W
W4:≤4W
W6:≤5W


Cu Zn < 1%
Empty:Conventional
NX:Cu Zn < 1%

Environmental temperature
S:-20~60°C
L:-40~60°C

Product Dimension Drawing

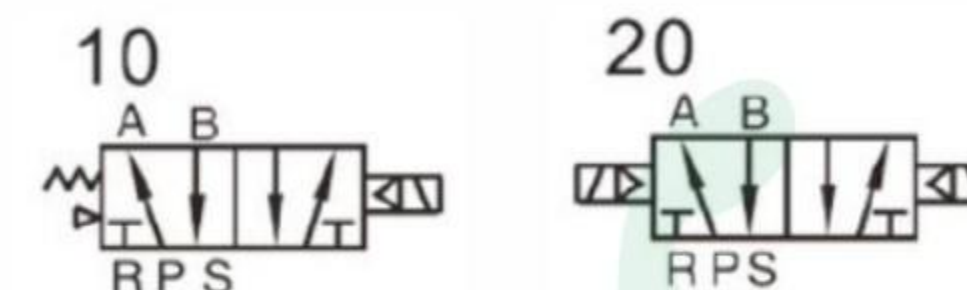

Dimensions

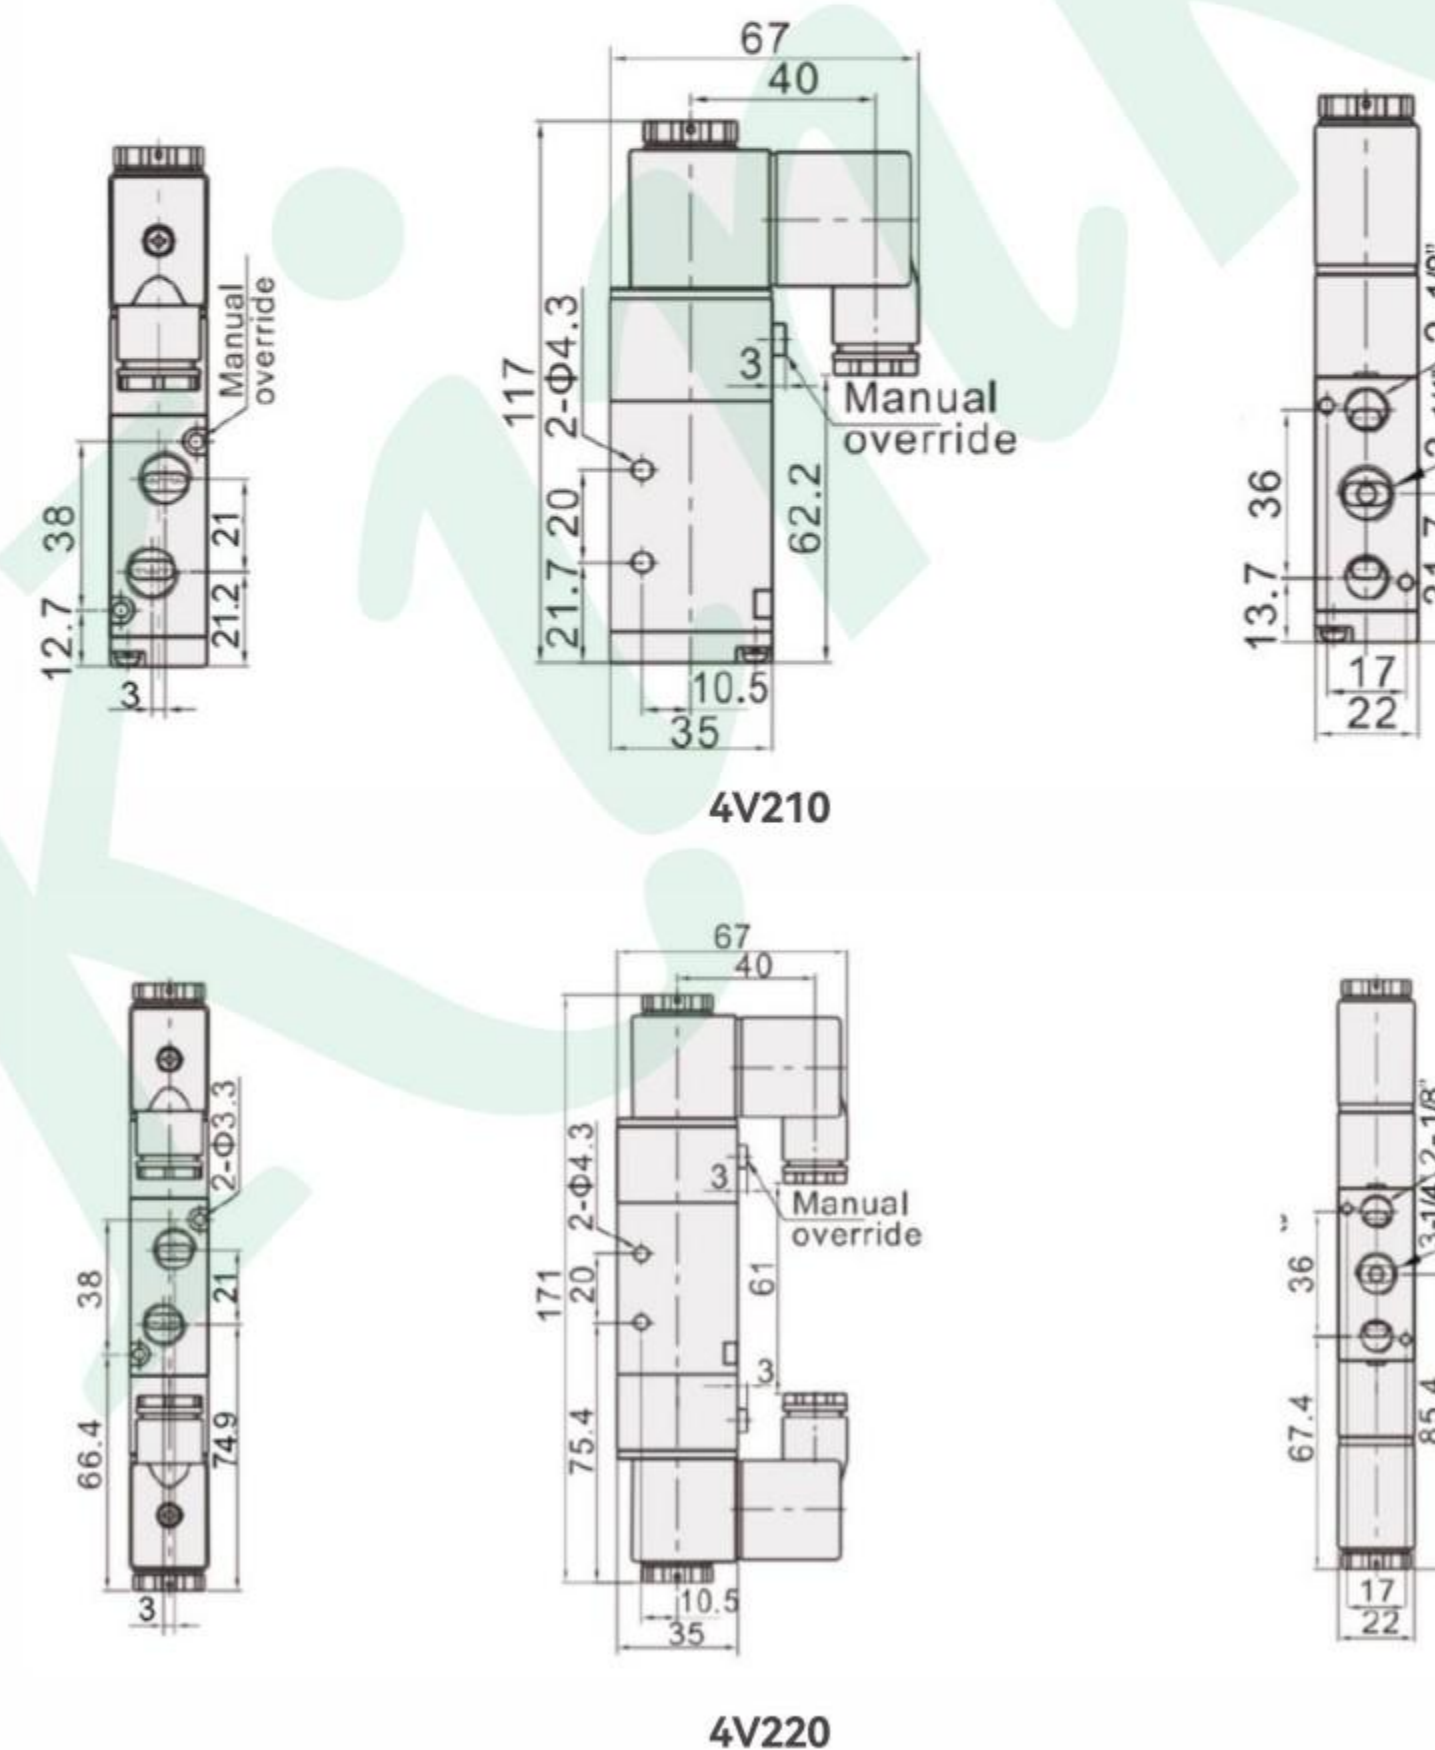

KK-4V310/320 SERIES(5/2 WAY)

Kinko

Kinko



Features

- Internally piloted structure
- Structure in sliding column mode: good tightness and sensitive reaction
- Double control solenoid valves have memory function
- No need to add oil for lubrication
- Install in the side plate with the surface upward, which can be used by directly connecting with the actuators
- Affiliated manual devices are equipped to facilitate installation and debugging
- Integrate with the manifold to save installation space.

Certificate and approvals

- EAC(TR CU 010/2011, TR CU 020/2011)

Technical Parameters

Model	KK-4V310-08KK-4V320-08KK-4V310-10KK-4V320-10			
Materia of body	Aluminum alloy			
Fluid	Air(to be filtered by 40μm filter element)			
Acting	Internal pilot			
Valve type	5 port 2 postion(5/2 way)			
Operating pressure	0.15~0.8 Mpa (21~114 psi)			
Proof pressure	1.2 Mpa(175 psi)			
Temperature	-20~+70℃			
Lubrication[note 1]	Not required			
Max.frequency[note 3]	4 cycle/sec			
Port size[note 2]	In=Out=Exhause=1/4"		In=Out=3/8"	
			Exhaust=1/4"	
Orifice size CV[note 4]	28.0mm ² (CV=1.65)			
Weight	310g	400g	310g	400g

[note 1] Once lubricated air is used, continue with same medium to optimize valve lifespan. Lubricants like ISO VG32 or equivalent are recommended.

[note 2] PT thread, G thread and NPT thread are available.

[note 3] The maximum actuation frequency is in the no-load state.

[note 4] Equivalent orifice S and Cv are all calculated from the flow rate data.

Coil Specification

Model	4V310-08, 4V320-08, 4V310-10, 4V320-10				
Standard voltage	AC220V	AC110V	AC24V	DC24V	DC12V
Power consumption	4.5VA	4.5VA	5.0VA	3.0w	2.5w
Scope of voltage	AC: ±15%, DC: ±10%				
Protection grade	IP 66				
Temperature classification	B Class				
Electrical entry	Terminal				
Activating time	0.05sec and below				

Ordering Code

KK-4 V 3 10 08 0V W3 □ □ S

Model
Solenoid valve
NAMUR
STANDARD

Valve body type
V: Thin valve body,
pipe connection
Single electronic
control

Code
3:3 Series

Valve type
10: Single coil
20: Double coil

Electrical entry
08: 1/4"
10: 3/8"


Standard voltage
0V: 24VDC
1V: 110VAC
2V: AC220V

Power
W3: ≤3W
W4: ≤4W
W6: ≤5W


Cu Zn < 1%
Empty: Conventional
NX: Cu Zn < 1%

Environmental temperature
S: -20~60°C
L: -40~60°C

Product Dimension Drawing

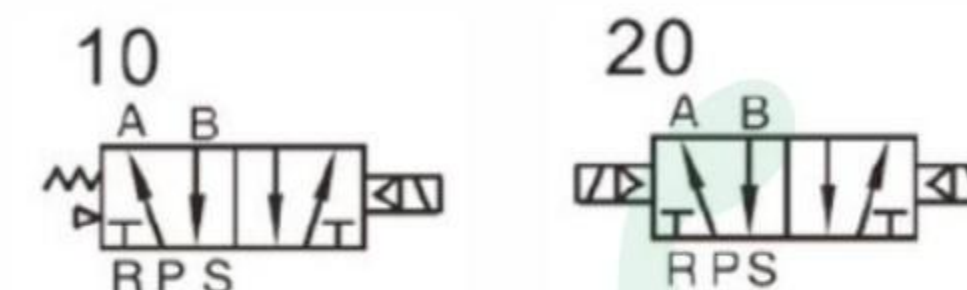

Dimensions

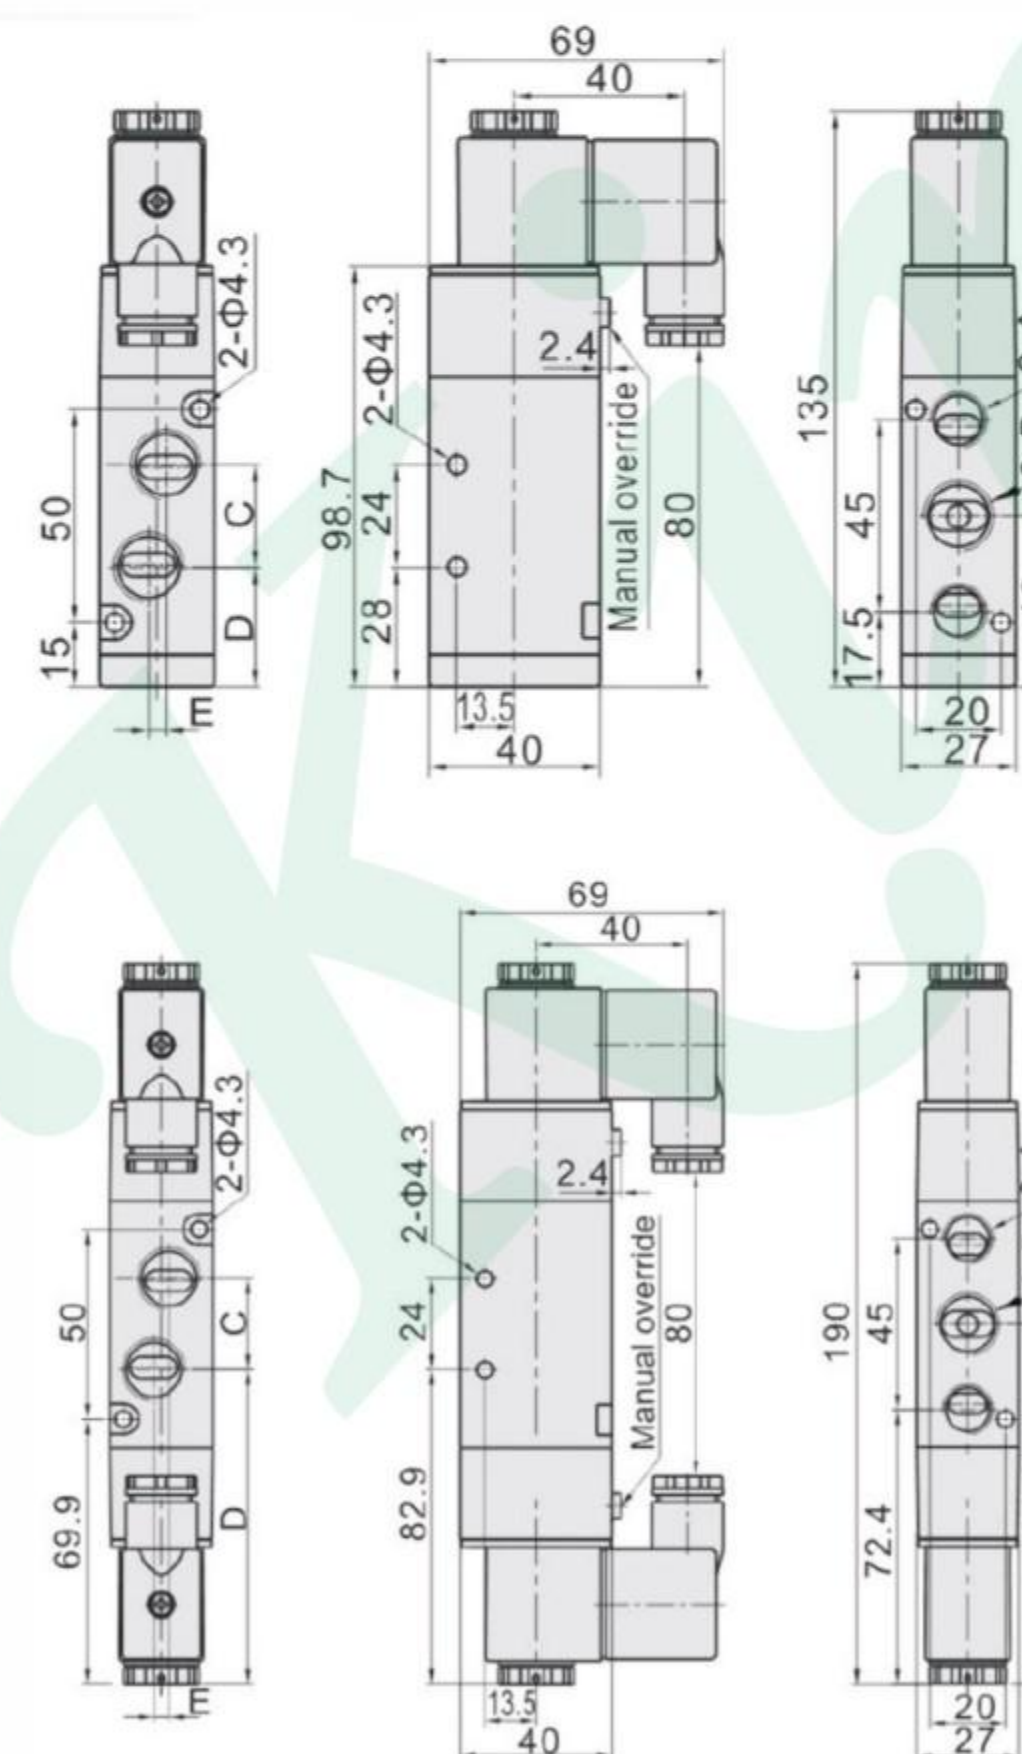

4V310

Model/Item	A	B	C	D	E
4V310-08	1/4"	1/4"	22	29	0
4V310-10	1/4"	3/8"	24	28	4

4V320

Model/Item	A	B	C	D	E
4V320-08	1/4"	1/4"	22	83.9	0
4V320-10	1/4"	3/8"	24	83.9	4

KK-4V410/420-08 SERIES

Kinko

Kinko



Features

- Internally piloted structure
- Structure in sliding column mode: good tightness and sensitive reaction
- Double control solenoid valves have memory function
- No need to add oil for lubrication
- Install in the side plate with the surface upward, which can be used by directly connecting with the actuators
- Affiliated manual devices are equipped to facilitate installation and debugging
- Integrate with the manifold to save installation space.

Certificate and approvals

- EAC (TR CU 010/2011, TR CU 020/2011)

Technical Parameters

Model	KK-4V410-08KK-4V420-08KK-4V410C-15KK-4V430E-15KK-4V430P-15				
Materia of body	Aluminum alloy				
Fluid	Air(to be filtered by 40μm filter element)				
Acting	Internal pilot				
Valve type	5 port 2 postion(5/2 way)		5port 3 postion (5/3way)		
Operating pressure	0.15~0.8 Mpa (21~114 psi)				
Proof pressure	1.2 Mpa(175 psi)				
Temperature	-20~~+70℃				
Lubrication[note 1]	Not required				
Max.frequency[note 3]	3 cycle/sec				
Port size[note 2]	In=Out=Exhause=1/2"				
Orifice size CV[note 4]	4V410-15,4V420-15:48.0mm ² (CV=2.82)				
	4V430C-15:40.0mm ² (CV=2.35)				
Weight	590g	720g	770g		

[note 1] Once lubricated air is used, continue with same medium to optimize valve lifespan. Lubricants like ISO VG32 or equivalent are recommended.

[note 2] PT thread, G thread and NPT thread are available.

[note 3] The maximum actuation frequency is in the no-load state.

[note 4] Equivalent orifice S and Cv are all calculated from the flow rate data.

Coil Specification

Model	4V410-15, 4V420-15, 4V430C-15, 4V430E-15, 4V430P-15				
Standard voltage	AC220V	AC110V	AC24V	DC24V	DC12V
Power consumption	4.5VA	4.5VA	5.0VA	3.0W	2.5W
Scope of voltage	AC: ±15%, DC: ±10%				
Protection grade	IP 66				
Temperature classification	B Class				
Electrical entry	Terminal				
Activating time	0.05sec and below				

Ordering Code

KK-4 V 4 10 08 0V W3 S

Model
Solenoid valve
NAMUR
STANDARD

Valve body type
V: Thin valve body,
pipe connection
Single electronic
control

Code
4: 4 Series

Valve type
10: Single coil
20: Double coil


Electrical entry
08: 1/4"
10: 3/8"
15: 1/2"

Standard voltage
0V: 24VDC
1V: 110VAC
2V: AC220V


Power
W3: ≤3W
W4: ≤4W
W6: ≤5W

Environmental temperature
S: -20~60°C
L: -40~60°C

Product Dimension Drawing

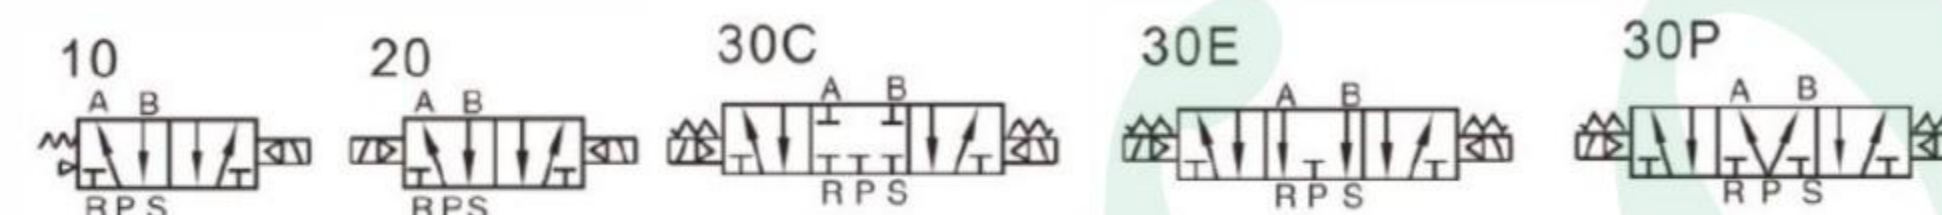

Dimensions

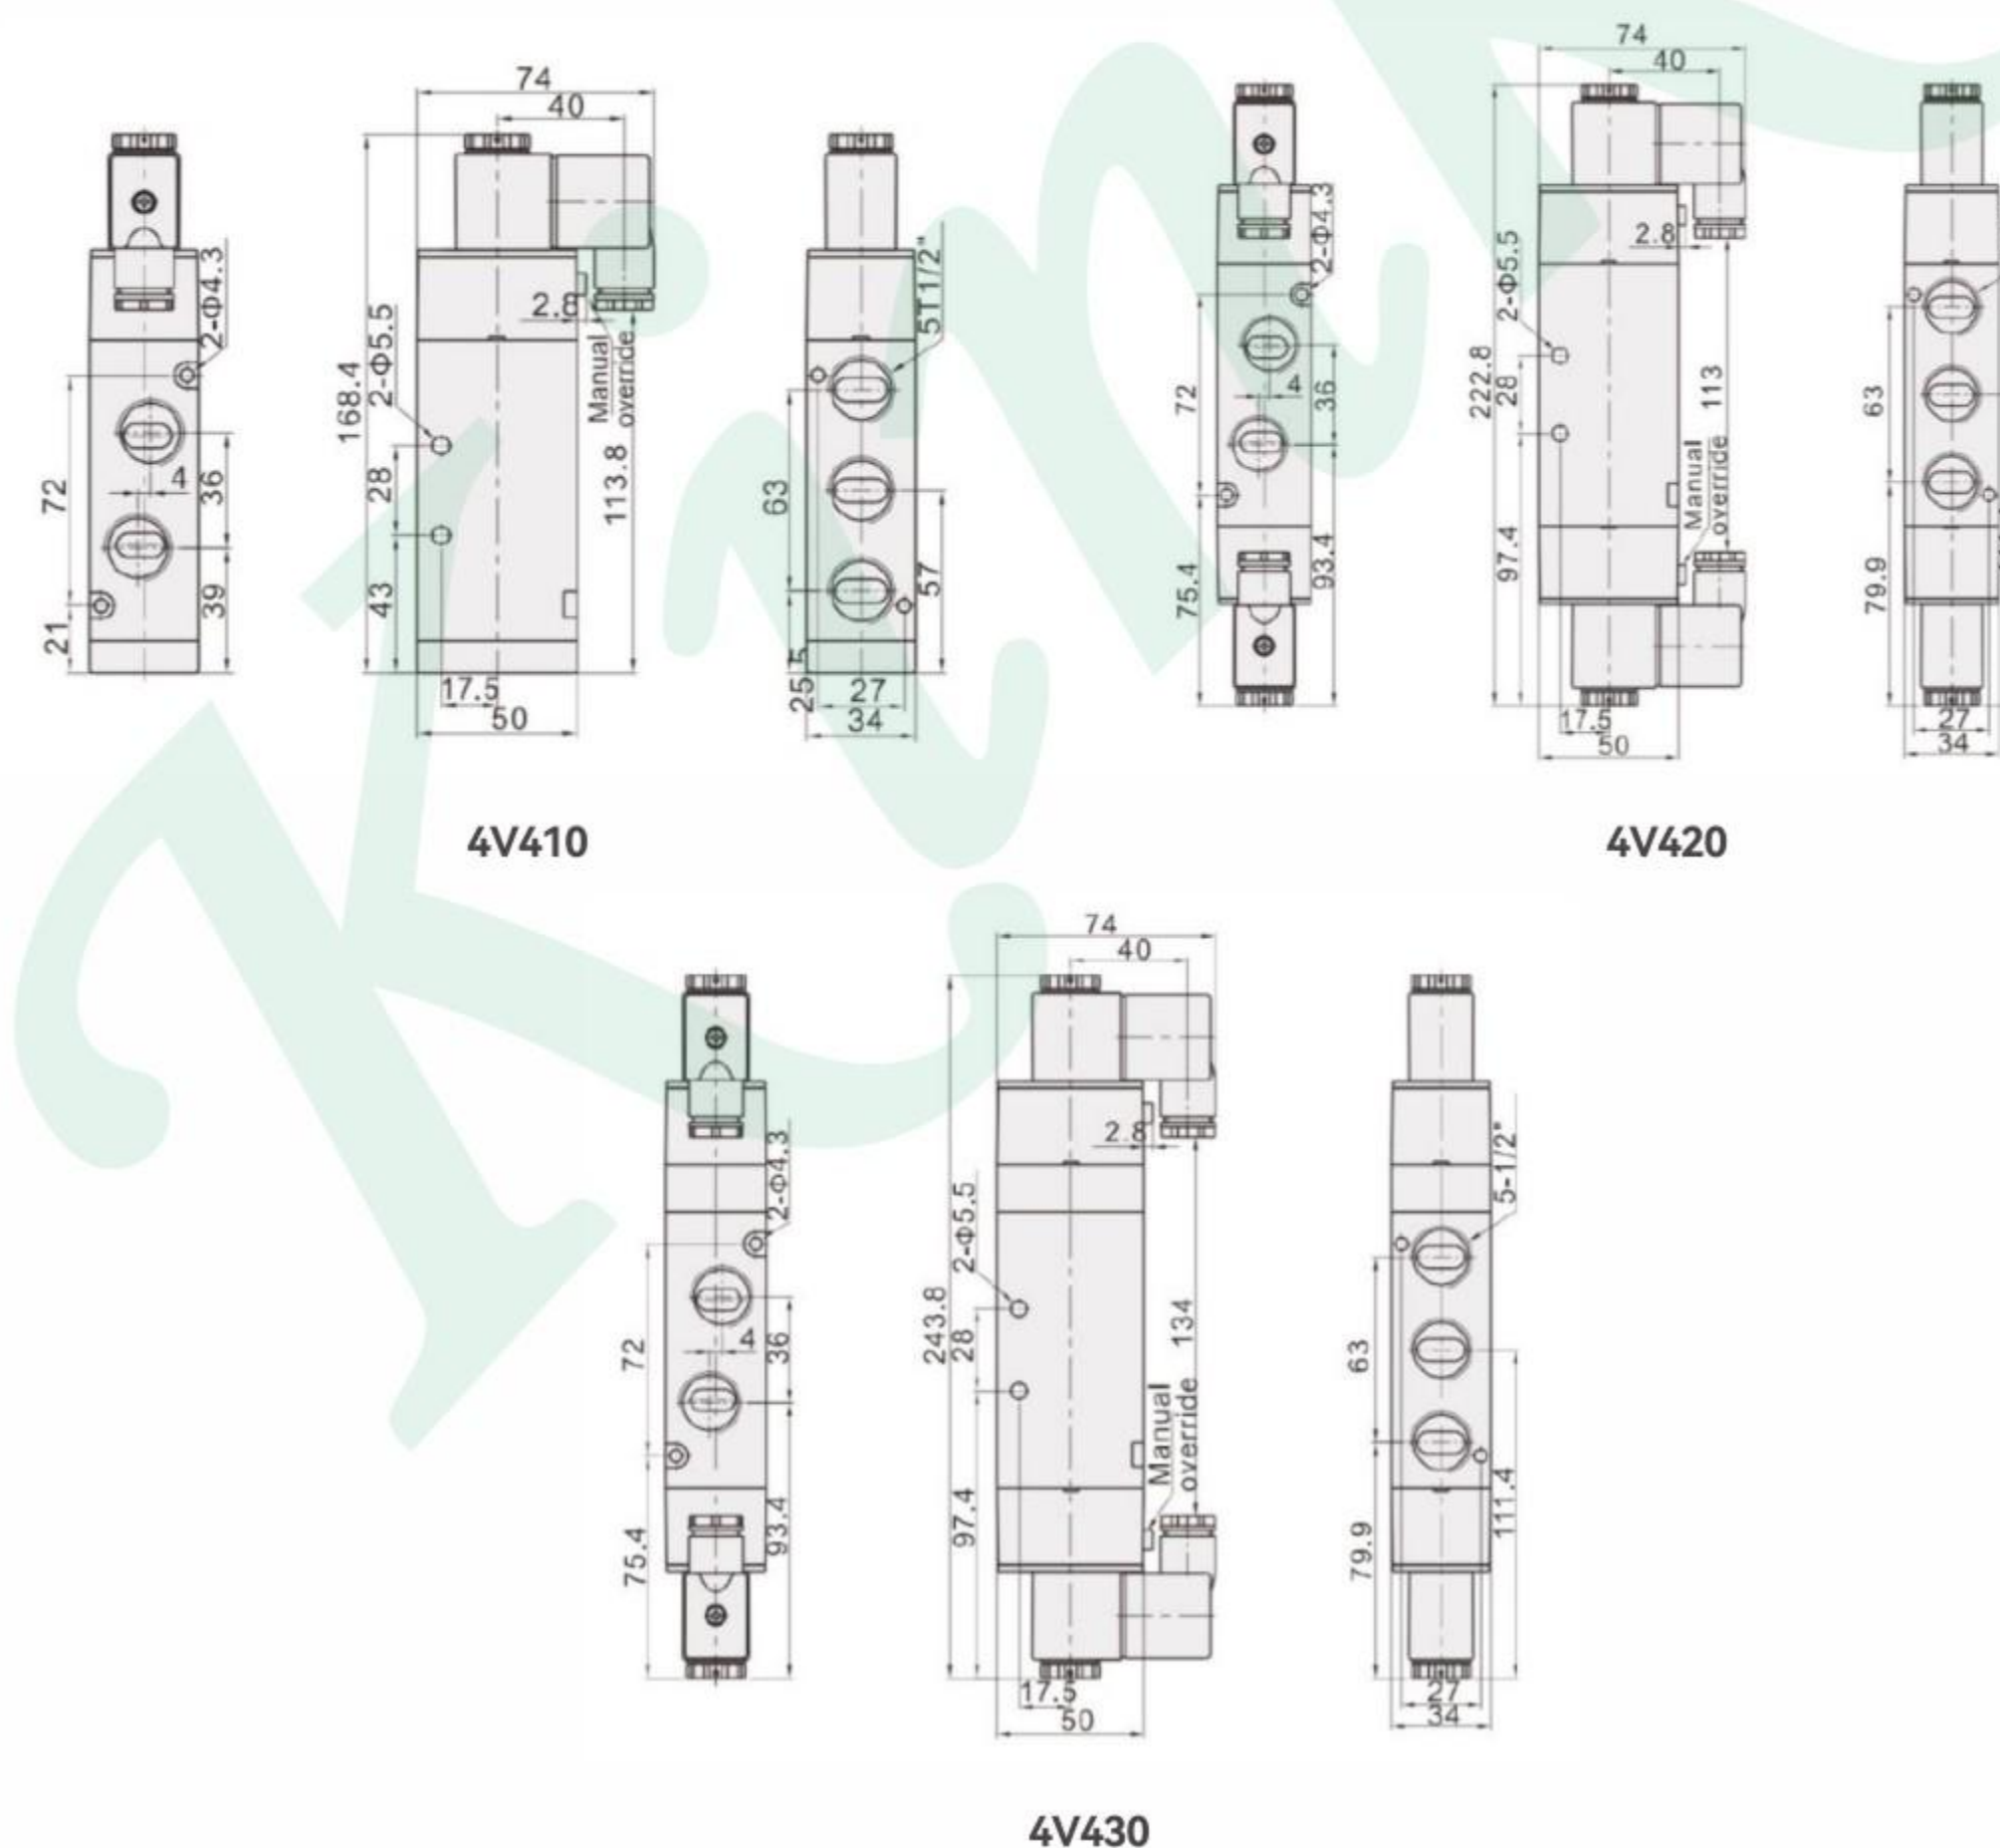

KK-3V310 SERIES(3/2 WAY)

Kinko

Kinko



Features

- Pilot-oriented mode:Internal pilot
- Structure in sliding column mode:good tightness and sensitive reaction
- Double control solenoid valves have memory function
- Internal hole adopts special processing technology which has little attrition friction, low start pressure and long service life
- No need to add oil for lubrication
- Several standard voltage grades are optional
- Integrate with the manifold to save installation space

Certificate and approvals

- EAC(TR CU 010/2011,TR CU 020/2011)

Technical Parameters

Model	KK-3V310-08	KK-3V320-08	KK-3V310-10	KK-3V320-10
Materia of body	Aluminum alloy			
Fluid	Air(to be filtered by 40μm filter element)			
Acting	Internal pilot			
Valve type	3 port 2 postion(3/2 way)			
Operating pressure	0.15~0.8 Mpa (21~114 psi)			
Proof pressure	1.2 Mpa(175 psi)			
Temperature	-20~70℃			
Lubrication[note 1]	Not required			
Max.frequency[note 3]	5 cycle/sec			
Port size[note 2]	In=Out=1/4"		In=Out=3/8"	
Orifice size CV[note 4]	3V310-10,3V320-10:28.0mm ² (Cv=1.65)			

[[note 1](#)]Once lubricated air is used,continue with same medium to optimise valve lifespan.Lubricants like ISO VG32 or equivalent are recommended.

[[note 2](#)]PT thread,G thread and NPT thread are available.

[[note 3](#)]The maximum actuation frequency is in the no-load state.

[[note 4](#)]Equivalent orifice S and Cv are all calculated from the flow rate data.

Coil Specification

Model	3V310-08,3V320-08,3V310-10,3V320-10				
Standard voltage	AC220V	AC110V	AC24V	DC24V	DC12V
Power consumption	4.5VA	4.5VA	5.0VA	3.0w	2.5w
Scope of voltage	AC:±15%,DC:±10%				
Protection grade	IP 66				
Temperature classification	B Class				
Electical entry	Terminal				
Activating time	0.05sec and below				

Ordering Code

KK-3 V 3 10 08 0V W3 S

Model

Solenoid valve
NAMUR
STANDARD

Valve body type

V:Thin valve body,
pipe connection
Single electronic
control

Code

3:3 Series

Valve type

10:Single coil
20:Double coil

Electrical entry

08:1/4"
10:3/8"

Standard voltage

0V:24VDC
1V:110VAC
2V:AC220V


Power

W3:≤3W
W4:≤4W
W6:≤5W

Environmental temperature

S:-20~60°C
L:-40~60°C

Product Dimension Drawing

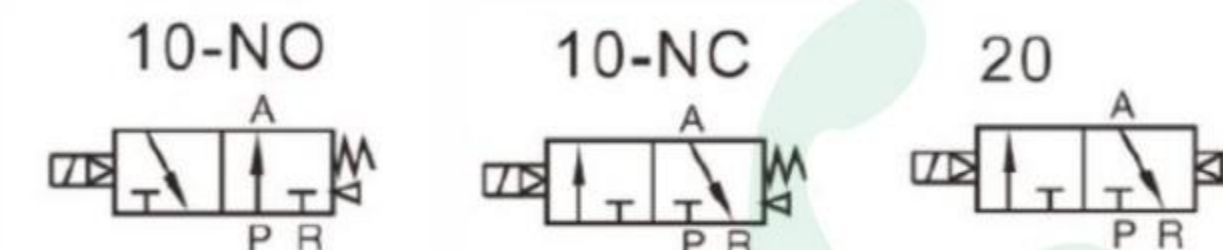

Dimensions





KK-4V/M 310-AS SERIES(5/2 WAY)

Kinko



Features

- Internally piloted structure
- Structure in sliding column mode:good tightness and sensitive reaction
- Internal hole adopts special processing technology which has little attrition friction, low start pressure and long service life
- No need to add oil for lubrication
- Install in the side plate with the surface upward, which can be used by directly connecting with the actuators
- Affiliated manual devices are equipped to facilitate installation and debugging
- NAMUR standard mounting method

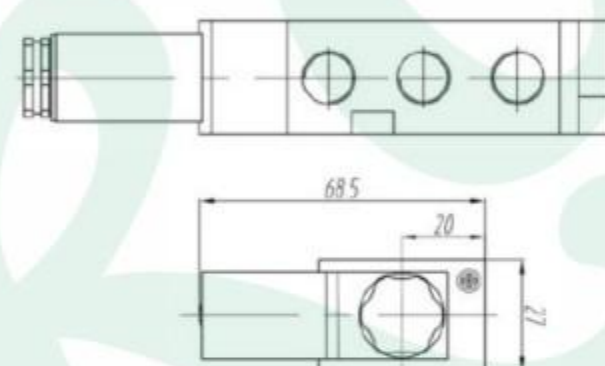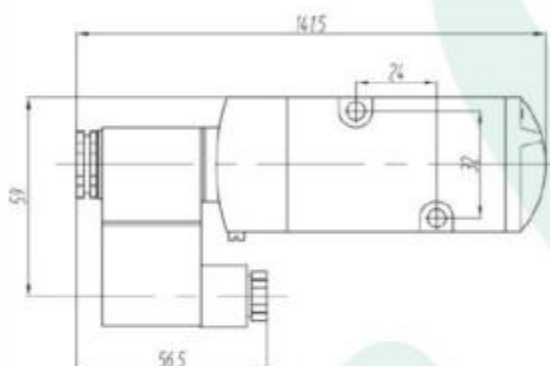

Technical Parameters

Model	KK-4M310-08-AS	KK-4V310-08-AS
Material of body	Aluminum alloy	
Fluid	Air(to be filtered by 40μm filter element)	
Acting	Internal pilot	
Valve type	5 port 2 position(5/2 way)	
Operating pressure	0.15~0.8 Mpa (21~114 psi)	
Proof pressure	1.2 Mpa(175 psi)	
Temperature	-20~+70°C	
Lubrication[note 1]	Not required	
Max.frequency[note 3]	4 cycle/sec(4M3series)	
Port size[note 2]	In=Out=1/4"	

[[note 1](#)]Once lubricated air is used,continue with same medium to optimise valve lifespan.Lubricants like ISO VG32 or equivalent are recommended.
[[note 2](#)]PT thread,G thread and NPT thread are available.
[[note 3](#)]The maximum actuation frequency is in the no-load state.
[[note 4](#)]Equivalent orifice S and Cv are all calculated from the flow rate data.

Coil Specification

Model	DS-4M310-08				
Standard voltage	AC220V	AC110V	AC24V	DC24V	DC12V
Power consumption	4.5VA	4.5VA	5.0VA	3.0w	2.5w
Scope of voltage	AC:±15%,DC:±10%				
Protection grade	IP 66				
Temperature classification	B Class				
Electrical entry	Terminal				
Activating time	0.05sec and below				

Ordering Code

KK-4 M 3 10 08 0V W3 S-AS

Model

Solenoid valve
(5/2 way)
NAMUR
STANDARD

Valve body type

M: Thin valve body,
Plate-type connection
V:Thin valve body,
pipe connection
Single electronic
control

Code

3:3 Series

Valve type

10:Single coil

Electrical entry

08:1/4"
10:3/8"

Standard voltage

0V:24VDC
1V:110VAC
2V:AC220V

Power

W3:≤3W
W4:≤4W
W6:≤5W

Environmental temperature

S:-20~60°C
L:-40~60°C

Product Number

KK800-XC SERIES

Kinko






Features

- Pilot-operated structure
- Standard solenoid valves are supplied as single coil units
- Cable entry could swivel 360°
- Universal for both 5/2 way and 3/2 way valve
- Universal of both NAMUR and pipe connection mounting method
- No need to add oil for lubrication

Certificate and approvals

- SIL3
- CE
- CCC(Ex db IIC T6 Gb,Ex tb IIIC T80°C Db)
- EAC(1Ex db h IIC T6 Gb X,Ex h tb IIIC T80°C DbX)

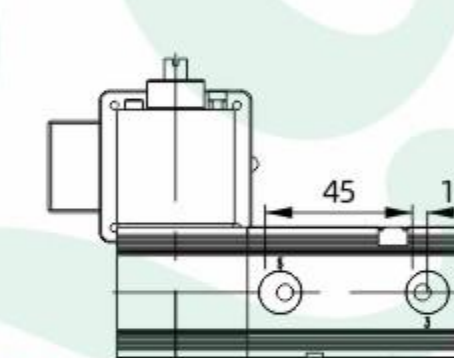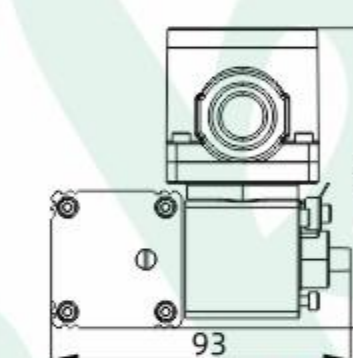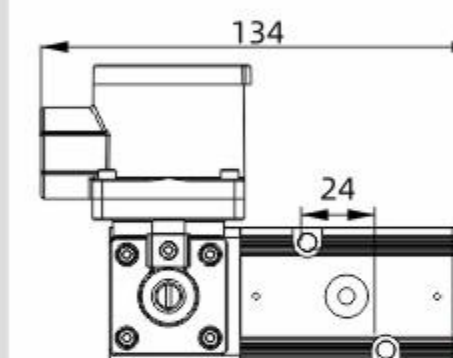

Technical Parameters

Material of body	Aluminum Alloy
Finishing	Anodized(electroless nickel plating)
Enclosure	wetherproof enclosure IP66
Fluid	Air(to be filtered by 40μm filter element)
Valve type	Universal for both 5/2 way and 3/2 way
Operating pressure	1~8 bar
Temperature	-20 ~ 60°C, -40~60°C
Orifice size CV	25mm ² CV=1.4
Voltage & Consumed power	3.5W 110/220VAC
Port size	G1/4",NPT1/4"
Cable Entry	M20*1.5,NPT1/2",G1/2"
Product life	More than 3.5million times (under normal working conditions)

[[note 1](#)]Once lubricated air is used,continue with same medium to optimise valve lifespan.
Lubricants like ISO VG32 or equivalent are recommended.
[[note 2](#)]Equivalent orifice S and Cv are all calculated from the flow rate data.

Ordering Code

KK800-X-V0 N 2N G S C S

Explosion-proof series

KK800-X:Ex db
FC800:Ex db mb

Voltage

V0:24VDC
V1:110VAC
V2:220VAC

Shell material

N:Aluminum alloy

Connector port

2N:NPT1/2
0M:M20*1.5
2G:1/2

Air source interface

G:G1/4
N:NPT1/4

Ambient temperature

S:-20~60°C
L:-40~60°C

Electromagnetic head type

C

Electrical control device

S:Single Electric Control
D:Dual Electric Control

KK800-XC-SS Series

Kinko




Features

- Pilot-operated structure
- Made of Stainless Steel 316
- Standard solenoid valves are supplied as double units
- Universal for both 5/2 way and 3/2 way valve
- NAMUR mounting standard
- No need to add oil for lubrication

Certificate and approvals

- SIL3
- CE
- CCC(Ex db IIC T6 Gb,Ex tb IIIC T80°C Db)
- EAC(1Ex db h IIC T6 Gb X,Ex h tb IIIC T80°C DbX)

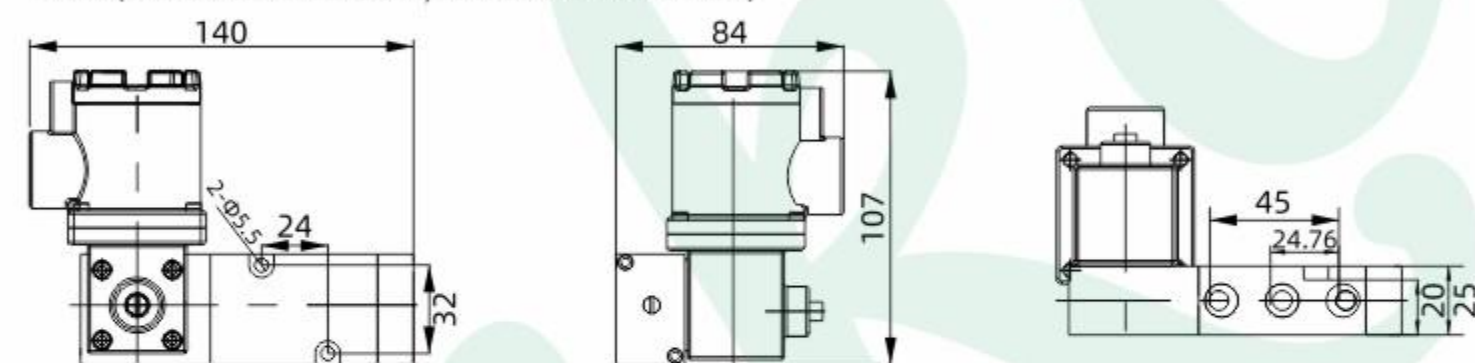

Technical Parameters

Material of body	Stainless Steel 316
Enclosure	wetherproof enclosure IP66
Fluid	Air(to be filtered by 40μm filter element)
Valve type	Universal for both 5/2 way and 3/2 way
Operating pressure	1~8 bar
Temperature	-20 ~ 60°C, -40~60°C
Orifice size CV	25mm ² CV=1.4
Voltage & Consumed power	3.5W 110/220VAC
	3.0W 24DVC
Port size	G1/4",NPT1/4"
Cable Entry	M20*1.5,NPT1/2",G1/2"
Product life	More than 3.5million times (under normal working conditions)

[note 1]Once lubricated air is used,continue with same medium to optimise valve lifespan.
Lubricants like ISO VG32 or equivalent are recommended.
[note 2]Equivalent orifice S and Cv are all calculated from the flow rate data.

Ordering Code

KK800 V0 S 2N G S C M S

Explosion-proof series
KK800:Ex db

Voltage
V0:24VDC
V1:110VAC
V2:220VAC

Shell material
S:316

Connector port
2N:NPT1/2
0M:M20*1.5
2G:1/2

Air source interface
G:G1/4
N:NPT1/4

Ambient temperature
S:-20~60°C
L:-40~60°C

Electromagnetic head type
C

Valve body type
Empty:Thick valve
M:Thin plate type valve face type
V:Thin plate type pipe connection type

Electrical control device
S:Single Electric Control
D:Dual Electric Control

KK800-XK SERIES

Kinko




Features

- Pilot-operated structure
- Standard solenoid valves are supplied as single units
- Universal for both 5/2 way and 3/2 way valve
- Standard mounting method of NUMAR
- No need to add oil for lubrication

Certificate and approvals

- SIL3
- CE
- CCC(Ex db IIC T6 Gb,Ex tb IIIC T80°C Db)
- EAC(1Ex db h IIC T6 Gb X,Ex h tb IIIC T80°C DbX)

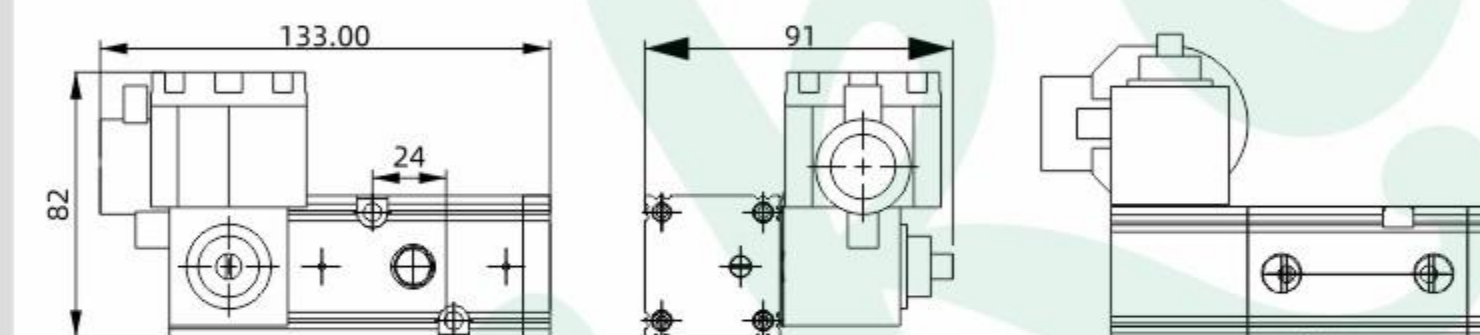

Technical Parameters

Material of body	Aluminum Alloy
Finishing	Anodized(electroless nickel plating)
Enclosure	wetherproof enclosure IP66
Fluid	Air(to be filtered by 40μm filter element)
Valve type	Universal for both 5/2 way and 3/2 way
Operating pressure	1~8 bar
Temperature	-20 ~ 60°C, -40~60°C
Orifice size CV	25mm ² CV=1.4
Voltage & Consumed power	3.5W 110/220VAC
	3.0W 24DVC
Port size	G1/4",NPT1/4"
Cable Entry	M20*1.5,NPT1/2",G1/2"
Product life	More than 3.5million times (under normal working conditions)

[note 1]Once lubricated air is used,continue with same medium to optimise valve lifespan.
Lubricants like ISO VG32 or equivalent are recommended.
[note 2]Equivalent orifice S and Cv are all calculated from the flow rate data.

Ordering Code

KK800-X-V0 N 2N G S K S

Explosion-proof series
KK800-X:Ex db

Voltage
V0:24VDC
V1:110VAC
V2:220VAC

Shell material
N:Aluminum alloy

Connector port
2N:NPT1/2
0M:M20*1.5
2G:1/2

Air source interface
G:G1/4
N:NPT1/4

Ambient temperature
S:-20~60°C
L:-40~60°C

Electromagnetic head type
K

Electrical control device
S:Single Electric Control
D:Dual Electric Control

AW2000 SERIES

Kinko



Technical Parameters

Model	AW2000-02 series
Housing	Aluminum alloy
Material	Bowl Sealing Adjusting knob
	PC NBR POM
Regulating range	0.05~0.85 Mpa
Max.service pressure	1Mpa
Ensure pressure resistance	1.5Mpa
Filtering accuracy	40μm or 5μm
Recommended oil	ISOVG 32
Temperature	-5~60°C
Valve type	Diaphragm type
Gauge	Standard:Round type(G1/8") Option:Square embedded type
Port size	G1/4"
Capacity of air bowl	25CC



Technical Parameters

Model	AC2000-02 series
Housing	Aluminum alloy
Material	Bowl Sealing Adjusting knob
	PC Aluminum alloy POM
Regulating range	0.05~0.85 Mpa
Max.service pressure	1Mpa
Ensure pressure resistance	1.5Mpa
Filtering accuracy	40μm or 5μm
Recommended oil	ISOVG 32
Temperature	-5~60°C
Valve type	Diaphragm type
Gauge	Standard:Round type(G1/8") Option:Square embedded type
Port size	G1/4"
Capacity of air bowl	25CC
Capacity of drain bowl	15CC



Round gauge



Square embedded gauge

Ordering Code

AW 2000-02 N J D □

Model

AW:single cup
(F.R.combination)
AC:double cup
(F.R.L.combination)

Code

2000:2000 series

Port size

02:G1/4"
03:G3/8"
05:G3/4"
06:1G

Gauge type

Blank:Round type
N:Square embedded type

Bowl guard material

Blank:PC
H:half aluminum
J:full aluminum

Drain type

Blank:Manual drainage
D:automatic drain

Cu Zn < 1%

Blank:Ordinary
NX:Cu Zn < 1%

KJW2000 -02A Series

Kinko



Technical Parameters

Model	KJW2000-02J series
Housing	Zinc alloy
Material	Bowl Sealing Adjusting knob
	Aluminum alloy NBR Stainless steel
Regulating range	0.05~0.85 Mpa
Max.service pressure	1Mpa
Ensure pressure resistance	1.5Mpa
Filtering accuracy	40μm or 5μm
Recommended oil	ISOVG 32
Temperature	-40~60°C
Valve type	Diaphragm type
Gauge	Standard:Round type(G1/8")
Port size	G1/4"
Capacity of air bowl	25CC



Technical Parameters

Model	KJW2000-02J series
Housing	Aluminum alloy
Material	Bowl Bowl guard Sealing Adjusting knob
	PC Aluminum alloy NBR Stainless steel
Regulating range	0.05~0.85 Mpa
Max.service pressure	1Mpa
Ensure pressure resistance	1.5Mpa
Filtering accuracy	40μm or 5μm
Recommended oil	ISOVG 32
Temperature	-40~60°C
Valve type	Diaphragm type
Gauge	Standard:Round type(G1/8")
Port size	G1/4"
Capacity of air bowl	25CC
Capacity of drain bowl	15CC



Round gauge



Square embedded gauge

Ordering Code

KJW 2000-02 J L

Model

KJW
Low-temperature series

Code

2000 single cup
2010 double cup

Port size

Blank:G1/4"

Bowl guard material

J:Full aluminum

Ambient temperature

Empty:-20~60°C
L:-40~60°C

AW3000 SERIES

Kinko



Technical Parameters

Model	AW3000-03 series
Housing	Zinc alloy
Bowl	PC
Bowl guard	Aluminum alloy
Sealing	NBR
Adjusting knob	POM
Regulating range	0.05~0.85 Mpa
Max.service pressure	1Mpa
Ensure pressure resistance	1.5Mpa
Filtering accuracy	40μm or 5μm
Recommended oil	ISOVG 32
Temperature	-5~60°C
Valve type	Diaphragm type
Gauge	Standard:Round type(G1/8") Option:Square embedded type
Port size	G3/8"
Capacity of air bowl	90CC



Technical Parameters

Model	AW3000-03 series
Housing	Zinc alloy
Bowl	PC
Bowl guard	Aluminum alloy
Sealing	NBR
Adjusting knob	POM
Regulating range	0.05~0.85 Mpa
Max.service pressure	1Mpa
Ensure pressure resistance	1.5Mpa
Filtering accuracy	40μm or 5μm
Recommended oil	ISOVG 32
Temperature	-5~60°C
Valve type	Diaphragm type
Gauge	Standard:Round type(G1/8") Option:Square embedded type
Port size	G3/8"
Capacity of air bowl	90CC
Capacity of drain bowl	60CC



Round gauge



Square embedded guage

Ordering Code

AW 3000-03 N J D

Model

AW:single cup
(F.R.combination)
AC:double cup
(F.R.L.combination)

Code

2000:2000 series

Port size

Blank:G3/8"

Guage type

Blank:Round type
N:square embedded type

Bowl guard material

Blank:PC
H:half aluminum
J:full aluminum

Drain type

Blank:Manual drainage
D:Automatic drainage

MINI SERIES

Kinko



Technical Parameters

Model	OFR-MINI series
Housing	Aluminum alloy
Bowl	PC
Bowl guard	Aluminum alloy
Sealing	NBR
Adjusting knob	POM
Regulating range	0.05~0.85 Mpa
Max.service pressure	1Mpa
Ensure pressure resistance	1.5Mpa
Filtering accuracy	40μm or 5μm
Recommended oil	ISOVG 32
Temperature	-5~60°C
Valve type	Diaphragm type
Gauge	Standard:Round type(G1/8") Option:Square embedded type
Port size	G1/8",G3/8",G1/4"
Capacity of air bowl	90CC



Technical Parameters

Model	LRC-MINI series
Housing	Aluminum alloy
Bowl	PC
Bowl guard	Aluminum alloy
Sealing	NBR
Adjusting knob	POM
Regulating range	0.05~0.85 Mpa
Max.service pressure	1Mpa
Ensure pressure resistance	1.5Mpa
Filtering accuracy	40μm or 5μm
Recommended oil	ISOVG 32
Temperature	-5~60°C
Valve type	Diaphragm type
Gauge	Standard:Round type(G1/8") Option:Square embedded type
Port size	G1/8",G3/8",G1/4"
Capacity of air bowl	90CC
Capacity of drain bowl	60CC



Round gauge



Square embedded guage

Ordering Code

OFR - MINI - G1/8"

Model

OFR:single cup
(F.R.combination)
LRC:double cup
(F.R.L.combination)

Series

MINI:MINI series

Port size

G1/8"
G3/8"
G1/4"

AW2000F SERIES

Kinko



Technical Parameters

Model	AW2000F-02 series
Housing	Aluminum alloy
Bowl	PC
Sealing	NBR
Adjusting knob	POM
Regulating range	0.05~0.85 Mpa
Max.service pressure	1Mpa
Ensure pressure resistance	1.5Mpa
Filtering accuracy	40µm or 5µm
Recommended oil	ISOVG 32
Temperature	-5~60°C
Valve type	Diaphragm type
Gauge	Standard:Round type(G1/8") Option:Square embedded type
Port size	G1/4"
Capacity of air bowl	25CC



Technical Parameters

Model	AC2000F-02 series
Housing	Aluminum alloy
Bowl	PC
Bowl guard	Aluminum alloy
Sealing	NBR
Adjusting knob	POM
Regulating range	0.05~0.85 Mpa
Max.service pressure	1Mpa
Ensure pressure resistance	1.5Mpa
Filtering accuracy	40µm or 5µm
Recommended oil	ISOVG 32
Temperature	-5~60°C
Valve type	Diaphragm type
Gauge	Standard:Round type(G1/8") Option:Square embedded type
Port size	G1/4"
Capacity of air bowl	25CC
Capacity of drain bowl	15CC



Round gauge



Square embedded guage

Ordering Code

AW 2000F-02 N J D

Model

AW:single cup
(F.R.combination)
AC:double cup
(F.R.L.combination)

Code

2000:2000 series
(fibre filter cartridge)

Port size

Blank:G1/4"

GUAGE type

Blank:Round type
N:square embedded type

Bowl guard material

Blank:PC
H:half aluminum
J:full aluminum

Drain type

Blank:Manual drainage
D:Automatic drainage

AIR REGULATOR

Kinko

Technical Parameters

Model	KK-200B series
Material	Aluminum alloy
Regulating range	0.05~0.85 Mpa
Max.service pressure	1Mpa
Ensure pressure resistance	1.5Mpa
Temperature	-5~60°C
Gauge	Standard:Round type(G1/8")
Port size	G1/4",NPT 1/4"



Technical Parameters

Model	SFR series
Material	S.S.316
Regulating range	0.05~0.85 Mpa
Max.service pressure	1Mpa
Ensure pressure resistance	1.5Mpa
Temperature	-5~60°C
Gauge	Standard:Round type(G1/8")
Port size	NPT 3/8"



AFTER-SALES SERVICE & COMMITMENT
24 HOURS ONLINE ,LIFETIME SERVICE



AFTER-SALES SERVICE
QUALITY ASSURANCE COMMITMENT

With the further development of a national market economy, the increasingly fierce market competition, the majority of users of the product requirements also more and more high, and more and more demand for after-sale services, to this end, our quality management department in order to adapt to the requirement of market development, set up special after-sale service group, equipped with full-time service personnel shall be responsible for handling matters of our company product after-sales service. At the same time, our company has also made many efforts in internal quality management and obtained ISO9001 quality system certification, CE certification and a number of patent certificates, etc. To this end, our company is fully capable of:

- I. The products shall be issued with inspection certificates and instructions. I. to ensure that the users can correctly install and apply the products of our company.
- II. Our company guarantees that the products are produced and inspected in accordance with the relevant international standards, and unqualified products will never leave the factory. We promise to strictly perform and deliver the four packages of products, strictly implement the relevant regulations of national industrial products after-sales service, and within 12 months from the date of delivery of the products, we will be responsible for the quality of the products within the warranty period under the normal operating conditions specified in the product manual.
- III. If the user has any objection to the quality of our products, we promise to make Suggestions within 2 hours after receiving the objection. If it needs to be solved on site, it shall ensure that professional technical service personnel are dispatched, and the service personnel shall not be evacuated until quality problems are solved. We will archive the quality problem and result of every feedback.

The above three points are our company's commitment to after-sales service. We sincerely welcome your comments and Suggestions for improvement. We sincerely hope that we can have a pleasant cooperation.



A COOPERATION LIFETIME SERVICE

